








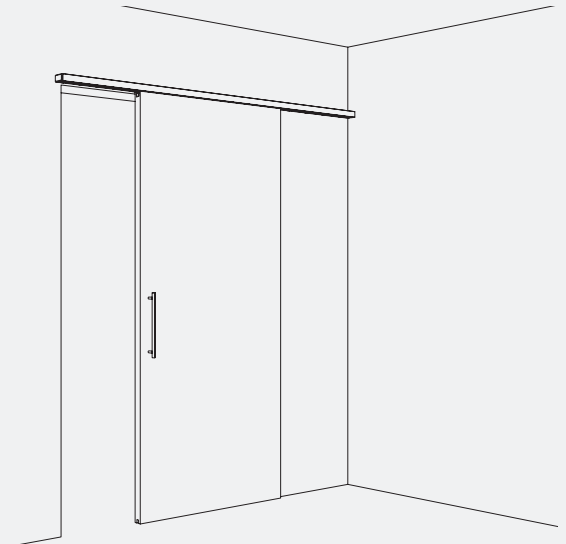
Fitting for top-running wooden doors up to 60 kg (132 lbs.), with surface mounted running track. Optionally with soft and self closing mechanism. Wall mounting. Minimal installation height.

Product highlights

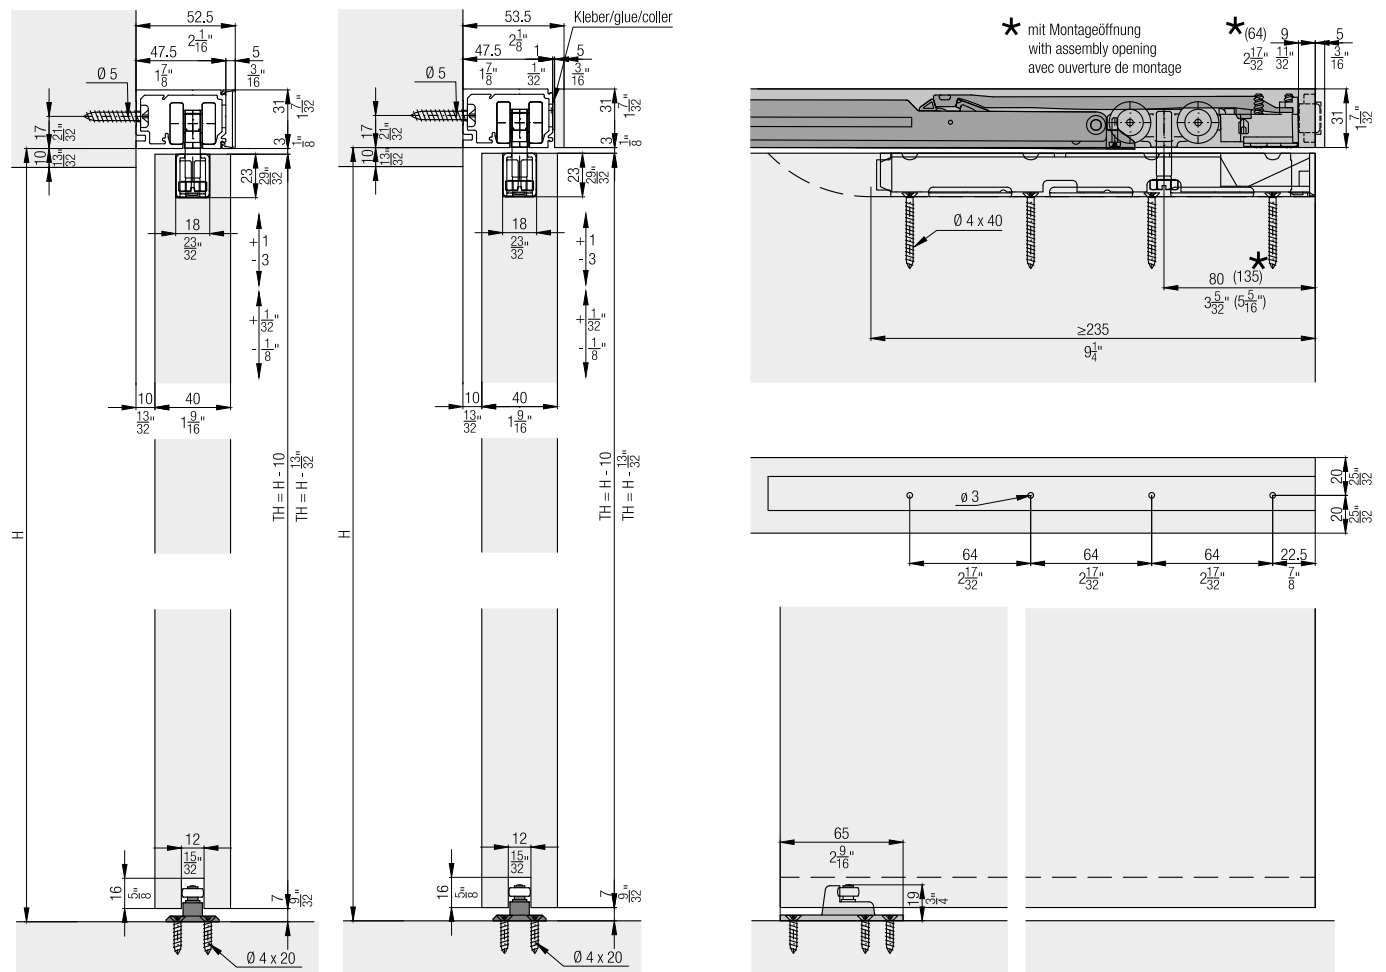
-  **Flexibility** Aluminium panel or customer-provided wooden panelling integrated in the system
-  **Productivity** Tool-less door mounting
-  **Aesthetics** Also available in black as a "Black Edition" design option for a particularly attractive appearance

Technical specifications

-  Max. 60 kg (132 lbs.)
-  Max. 2700 mm (8' 10 5/16")
-  Max. 1600 mm (5' 3")
-  30–45 mm (1 3/16" to 1 25/32")









Installation examples



**Set for wall mounting,
for 1 wooden door up to 60 kg (132 lbs.)**

	No.
Hawa Porta 60 HM/HMD, minimal installation height, for 1 door	057.3133.072
Hawa Porta 60 HMD, black, minimal installation height, for 1 door	057.3133.084






		057.3133.072	057.3133.084	No.
Set consisting of:				
	Running gear, plain bearings, rollers, plastic, blue	2	2	057.3115.071
	Stopper, with retention spring, plastic, gray	2		057.3073.072
	Hexagon head screw, M8x36 mm (5/16"x1 13/32"), steel, zinc-plated	2	2	042.0165.101
	Cover cap, plastic, grey	2	2	600.0000.533
	Running gear holder, plastic, anthracite	2	2	042.0167.001
	Housing, steel, zinc-plated	2	2	042.0166.101
	Countersunk head screw, 4x40 mm (5/32"x1 9/16"), steel, zinc-plated	8	8	766.5040.140
	Bottom guide, with roller, adjustable, plastic, anthracite	1	1	057.3120.071
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated	4		766.5042.120
	Stopper, with retention spring, plastic, black		2	057.3073.076
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated		4	600.0000.817

**Set for wall mounting,
for 1 wooden door up to 60 kg (132 lbs.)**



	No.
Hawa Porta 60 HMD, minimal installation height, with running track, 2000 mm (6' 6 3/4 "), aluminum, anodized, for 1 door	057.3136.071

		mm (inch)	057.3136.071	No.
Set consisting of:				
	Running gear, plain bearings, rollers, plastic, blue		2	057.3115.071
	Stopper, with retention spring, plastic, gray		2	057.3073.072
	Hexagon head screw, M8x36 mm (5/16"x1 13/32"), steel, zinc-plated		2	042.0165.101
	Cover cap, plastic, grey		2	600.0000.533
	Running gear holder, plastic, anthracite		2	042.0167.001
	Housing, steel, zinc-plated		2	042.0166.101
	Bottom guide, with roller, adjustable, plastic, anthracite		1	057.3120.071
	Fixation clip for wooden and aluminum panel, 2-piece set		1	057.3126.071
	Countersunk head screw, 4x40 mm (5/32"x1 9/16"), steel, zinc-plated		8	766.5040.140
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated		4	766.5042.120
	Single running track, aluminum, anodized, pre-drilled	2,000 (6' 6 3/4 ")	1	057.3112.199

Running tracks




		mm (inch)	No.
	Running track, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	057.3112.250
		3,500 (11' 5 25/32")	057.3112.350
		6,000 (19' 8 7/32")	057.3112.600
		cut to size	057.3112.990
	Running track, aluminum, black anodized, pre-drilled	2,500 (8' 2 7/16")	057.3112.255
		3,500 (11' 5 25/32")	057.3112.355
		cut to size	057.3112.990
	Running track, extended spacing of +9 mm (11/32") between door and wall, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	30617
		6,000 (19' 8 7/32")	30618
		cut to size	30668
	Running track, extended spacing of +20 mm (25/32") between door and wall, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	30619
		6,000 (19' 8 7/32")	30620
		cut to size	30669
	Disposable cover to running track Hawa Divido 100 / Hawa Porta 45/60/100, plastic, black	2,000 (6' 6 3/4 ")	057.3098.001
		cut to size	057.3098.990

Panels

		mm (inch)	No.
	Clip-on panel, wall mounting, aluminum, anodized	2,500 (8' 2 7/16")	057.3113.250
		3,500 (11' 5 25/32")	057.3113.350
		6,000 (19' 8 7/32")	057.3113.600
		cut to size	057.3113.990
	Clip-on panel, wall mounting, aluminum, black anodized	2,500 (8' 2 7/16")	057.3113.255
		3,500 (11' 5 25/32")	057.3113.355


End cap set for running track 057.3112.xxx

	No.
End cap set, with fixation clip, plastic, anthracite	057.3131.072
End cap set, with fixation clip, plastic, black	057.3131.075

		057.3131.072	057.3131.075	No.
Set consisting of:				
	End cap, plastic, anthracite	1		057.3131.071
	Fixation clip for wooden and aluminum panel, steel, zinc-plated	2	2	057.3126.101
	End cap set, plastic, anthracite		1	057.3131.076



Fixing clamp for the end pieces of wooden or aluminum panels

	No.
Fixation clip for wooden and aluminum panel, 2-piece set	057.3126.071

		057.3126.071	No.
Set consisting of:			
	Fixation clip for wooden and aluminum panel, steel, zinc-plated	2	057.3126.101

Panel end component set, 95 mm (3 3/4"), can be shortened, plastic, wall mounting

	No.
Panel end component set, with fixation clip, 95 mm (3 3/4"), plastic, anthracite	30485




		30485	No.
Set consisting of:			
	Panel end component, 95 mm (3 3/4"), plastic, anthracite, can be shortened	2	30133
	Fixation clip for wooden and aluminum panel, steel, zinc-plated	2	057.3126.101

Soft close

For soft closing in opening and closing direction
order 2 sets.

	No.
Soft close Hawa Porta 60/100, Divido 100, 10–60 kg (22 to 132 lbs.), 1 piece	042.3102.072



Set consisting of:

	042.3102.072	No.
 Soft close, top running, 10-60 kg (22 to 132 lbs.), plastic	1	042.3106.072
 Trigger for soft close in buildings, zinc die casting	1	042.3105.001
 Screw set soft close	1	600.0000.566


Cover for assembly opening

	No.
Cover cap to assembly opening, 1-piece set	042.3114.071




Set consisting of:

	042.3114.071	No.
 Cover cap assembly opening, plastic, gray	1	042.0172.001
 Screw set soft close	1	600.0000.566

Bottom guide set for wall mounting

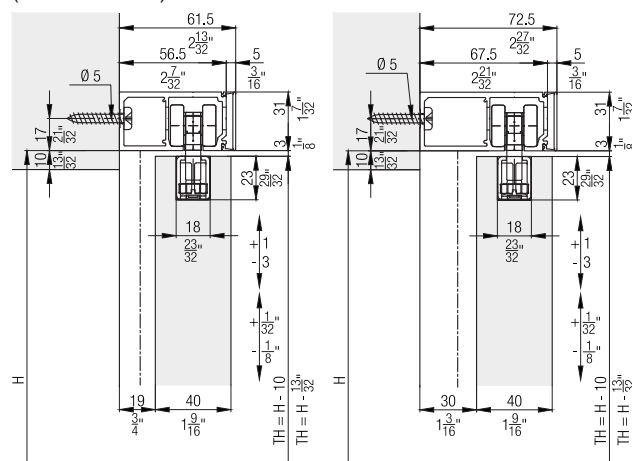
	No.
 Set bottom guide for wall mounting, with roller	057.3128.171

Accessories

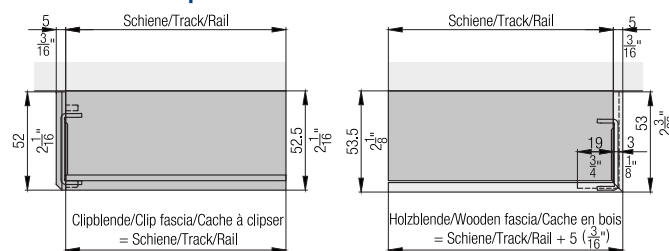
	No.
 Routing jig for assembly opening	042.3118.071
 Groove cutter to routing jig, Ø= 10 mm (13/32"), hard metal	600.0000.309
 Track cleaner, plastic, blue	057.3099.071

Further installation examples

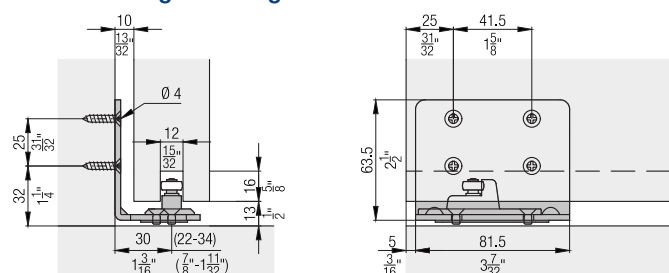
Wall mounting rails with extended spacing of +9 mm/+20 mm (11/32"/25/32") between door and wall.



Calculations of panels



Wall mounting bottom guide



Soft close

	$Z =$						
	1			2			
	0	1	2	0	1	2	
Hawa Porta 60/100 H/H/C	1' 6 $\frac{29}{32}$ "	1' 9 $\frac{1}{16}$ "	1' 11 $\frac{1}{4}$ "	2' 4 $\frac{3}{4}$ "	2' 6 $\frac{29}{32}$ "	2' 9 $\frac{3}{32}$ "	
Hawa Porta 60/100 HM/HMD/HMT	1' 6 $\frac{29}{32}$ "	1' 9 $\frac{1}{16}$ "	1' 11 $\frac{1}{4}$ "	2' 4 $\frac{3}{4}$ "	2' 6 $\frac{29}{32}$ "	2' 9 $\frac{3}{32}$ "	$Z \geq 535$ $Z \geq 1' 9\frac{1}{16}"$
Hawa Porta 100 G/GU/GM/GMT	1' 6 $\frac{29}{32}$ "	1' 9 $\frac{1}{16}$ "	1' 11 $\frac{1}{4}$ "	2' 4 $\frac{3}{4}$ "	2' 6 $\frac{29}{32}$ "	2' 9 $\frac{3}{32}$ "	
Hawa Porta 100 GF	1' 6 $\frac{29}{32}$ "			2' 4 $\frac{3}{4}$ "			
Hawa Porta 100 GW/GWF	1' 8 $\frac{5}{16}$ "	1' 9 $\frac{11}{32}$ "	1' 11 $\frac{1}{4}$ "	2' 6"	2' 6 $\frac{29}{32}$ "	2' 7 $\frac{3}{16}$ "	
Hawa Porta 100 GMD	1' 7 $\frac{7}{32}$ "	1' 9 $\frac{7}{32}$ "	1' 11 $\frac{1}{4}$ "	2' 5 $\frac{1}{16}$ "	2' 7 $\frac{1}{16}$ "	2' 7 $\frac{3}{16}$ "	
Hawa Divido 100 H/HM/GR	1' 6 $\frac{29}{32}$ "	1' 9 $\frac{1}{16}$ "	1' 11 $\frac{1}{4}$ "	2' 4 $\frac{3}{4}$ "	2' 6 $\frac{29}{32}$ "	2' 9 $\frac{3}{32}$ "	
Hawa Divido 100 GRM	1' 8 $\frac{5}{16}$ "	1' 10 $\frac{11}{32}$ "	1' 0 $\frac{1}{2}$ "	2' 6"	2' 8 $\frac{5}{32}$ "	2' 10 $\frac{11}{32}$ "	

	$Z =$					
	1			2		
	0	1	2	0	1	2
Hawa Porta 60/100 H/H/C	480	535	590	730	785	840
Hawa Porta 60/100 HM/HMD/HMT	480	535	590	730	785	840
Hawa Porta 100 G/GU/GM/GMT	480	535	590	730	785	840
Hawa Porta 100 GF	480			730		
Hawa Porta 100 GW/GWF	512	542	590	762	792	840
Hawa Porta 100 GMD	488	539	590	738	789	840
Hawa Divido 100 H/HM/GR	480	535	590	730	785	840
Hawa Divido 100 GRM	512	567	622	762	817	872

*** Montageöffnung assembly opening ouverture de montage**

Technical drawings and tables for the 60/100 series door and window profiles.

Top View Dimensions:

- Height: ≥ 62
- Width: $\geq 2 \frac{1}{16}$
- Length: ≥ 320
- Width (Detail): $\geq 1' \frac{19}{32}$
- Mounting Opening Dimensions: $Z \geq 480$, $Z = \geq 1' 6 \frac{3}{32}$

Side View Dimensions:

- Height: ≥ 62
- Width: $\geq 2 \frac{1}{16}$
- Length: ≥ 570
- Width (Detail): $\geq 1' 10 \frac{7}{16}$
- Mounting Opening Dimensions: $Z \geq 730$, $Z = \geq 2' 4 \frac{3}{32}$

Mounting Opening Details:

★ Montageöffnung
assembly opening
ouverture de montage

Table 1: Dimensions for 60/100 H/H/C, 60/100 HM/HMD/HMT, 100 G/GU/GM/GMT, 100 GF, 100 GW/GWF, 100 GMD

	Z =					
	1			2		
	0	1	2	0	1	2
Hawa Porta 60/100 H/H/C	1' 6 29/32	1' 9 1/16	1' 11 1/4	2' 4 3/4	2' 6 29/32	2' 9 3/32
Hawa Porta 60/100 HM/HMD/HMT	1' 6 29/32	1' 9 1/16	1' 11 1/4	2' 4 3/4	2' 6 29/32	2' 9 3/32
Hawa Porta 100 G/GU/GM/GMT	1' 6 29/32	1' 9 1/16	1' 11 1/4	2' 4 3/4	2' 6 29/32	2' 9 3/32
Hawa Porta 100 GF	1' 6 29/32			2' 4 3/4		
Hawa Porta 100 GW/GWF	1' 8 5/32	1' 9 11/32	1' 11 1/4	2' 6"	2' 6 29/32	2' 9 7/16
Hawa Porta 100 GMD	1' 7 7/32	1' 9 7/32	1' 11 1/4	2' 5 1/16	2' 7 1/16	2' 9 7/16

Table 2: Dimensions for Hawa Divido 100 H/HM/GR, Hawa Divido 100 GRM

	Z =					
	1			2		
	0	1	2	0	1	2
Hawa Divido 100 H/HM/GR	1' 6 29/32	1' 9 1/16	1' 11 1/4	2' 4 3/4	2' 6 29/32	2' 9 3/32
Hawa Divido 100 GRM	1' 8 5/32	1' 10 11/32	1' 0 1/2	2' 6"	2' 8 5/32	2' 10 11/32

Table 3: Dimensions for 60/100 H/H/C, 60/100 HM/HMD/HMT, 100 G/GU/GM/GMT, 100 GF, 100 GW/GWF, 100 GMD, 100 H/HM/GR, 100 GRM

	Z =					
	1			2		
	0	1	2	0	1	2
Hawa Porta 60/100 H/H/C	480	535	590	730	785	840
Hawa Porta 60/100 HM/HMD/HMT	480	535	590	730	785	840
Hawa Porta 100 G/GU/GM/GMT	480	535	590	730	785	840
Hawa Porta 100 GF	480			730		
Hawa Porta 100 GW/GWF	512	542	590	762	792	840
Hawa Porta 100 GMD	488	539	590	738	789	840
Hawa Divido 100 H/HM/GR	480	535	590	730	785	840
Hawa Divido 100 GRM	512	567	622	762	817	872

Accessories

- Lock solutions from page 511
- General accessories from page 518

Planning/execution

Further information about the product can be found on www.hawa.com.