










**Set for 4 sliding shutters up to 40 kg (88 lbs.)**

	No.
Hawa Frontslide 60 Matic Telescopic 4, for 4 sliding shutters	25137





**Set consisting of:**

	25137	No.
 Two-wheeled running gear, M8, plastic wheels	8	17119
 Top fixing plate, with suspension bolt M8, stainless steel	8	24562
 Clamp for toothed belt	1	24777
 Guide pulley wheel, with fixing plate, long	3	20139
 Guide pulley wheel, with fixing plate, short	3	20140
 Driver, wide	3	20141
 Driver, narrow	2	20142
 Driver counter-plate, wide	1	20246
 Toothed belt, 2.7 m (8'10 5/16"), fibre glass reinforced, black	3	20208

**Set Motronic 60 SMI**

	No.
Hawa Motronic 60 SMI for Hawa Frontslide 60 Matic, incl. control unit, toothed belt lock and pulley wheel	30520

**Set consisting of:**


	30520	No.
 Hawa Motronic 60 SMI with integrated control and connecting cable with a premounted Wieland plug	1	30298
 Wieland connector for Hawa Motronic 60/100/140 SMI	1	30277
 Pulley wheel for automatic mechanism	1	24792
 Toothed belt lock	1	19654
 End stop, aluminum	2	24786

**Toothed belt**

**Toothed belt length calculation: 2 x system width**

	No.
 Toothed belt, 2.7 m (8'10 5/16"), fibre glass reinforced, black	20208
Toothed belt, 5 m (16' 4 27/32"), fibre glass reinforced, black	19667
Toothed belt, 8 m (26' 2 31/32"), fibre glass reinforced, black	19682
Toothed belt, 10 m (32' 9 11/16"), fibre glass reinforced, black	19668
Toothed belt, 15 m (49' 2 9/16"), fibre glass reinforced, black	20370
Toothed belt, 50 m (164' 1/2"), fibre glass reinforced, black	19669


**Running tracks**

	mm (inch)	No.
	3500 (11' 5 25/32")	24839
	6000 (19' 8 7/32")	24795
	cut to size	24796

**Connecting pins for running tracks**

		No.
	Connecting bolts, 6-piece set	17221

**Guide tracks**

		mm (inch)	No.
	Guide track, aluminum, anodized, pre-drilled	6000 (19' 8 7/32")	24460
		cut to size	24462

**Panels**

		mm (inch)	No.
	Cover panel, aluminum, anodized	3500 (11' 5 25/32")	24845
		6000 (19' 8 7/32")	24808
		cut to size	24809
	Cover panel, aluminum	6000 (19' 8 7/32")	24810
		cut to size	24811


**Panel attachment components**

		No.
	Parts for fitting running track cover, at least every 500 mm (1' 7 11/16"), 5-piece set	24767

**Guides**

		No.
	Guide slider, for screw fixing	24542

**Start-up box**

		No.
	Commissioning box	23789
	SMI adapter for commissioning box	30363

**Technical data Hawa Motronic 60 SMI**

Drive with integrated controller, with SMI 3.0 BF interface, CE tested


Feed:	100 – 240 VAC, 50/60 Hz, 30 W
Max. preliminary fusing:	16 A
Overvoltage category:	II
Degree of protection:	I
Temperature range:	-20° C to +60° C
Contamination level:	1
IP protection level:	IP 54
Max. speed:	100 mm/s
Max. drive power:	100 N (with internal overload protection)
Switch elements:	Customer-provided
Mains isolation device:	Customer-provided

**Type plate**

<b>Hawa Motronic 60</b>			I- →
Artikel-Nr.	30298	<b>Hawa</b>	
Kontakt	www.hawa.com		
Charge	20ZZ/YYYYYY		
Key-ID	0016XXXXXX, Bj: 20ZZ		
Antriebskraft max.	100 N, IP54		
	100-240 VAC, 50/60 Hz, 30 W		
Geschwindigkeit max.	10 cm/s		
Betriebstemp.	-20 °C bis +60 °C		I+ →


**Actuation and operation of the system**

The system can be operated with normal commercial sun blind switches.

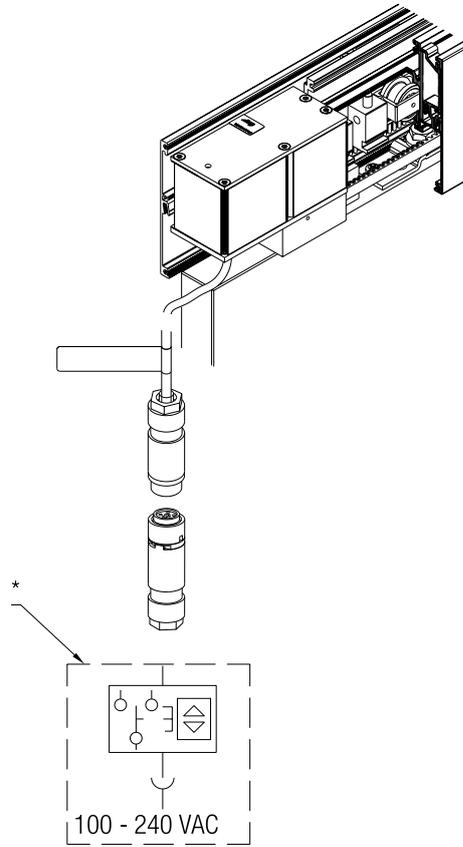


\* to be provided by customer


**Panel attachment component installation**

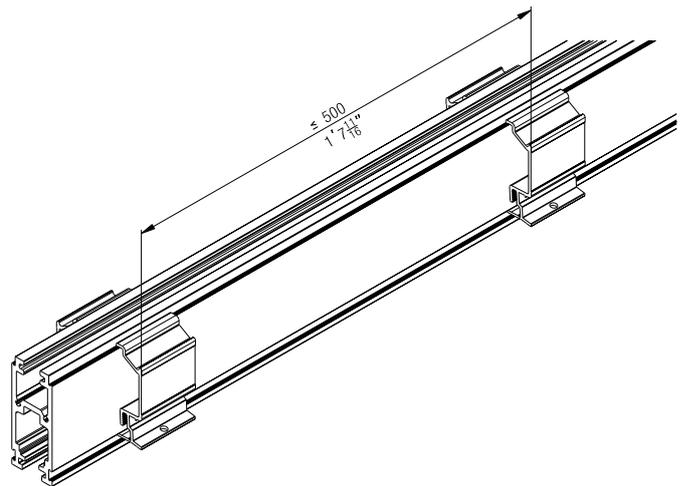


**Sliding shutter width calculations**

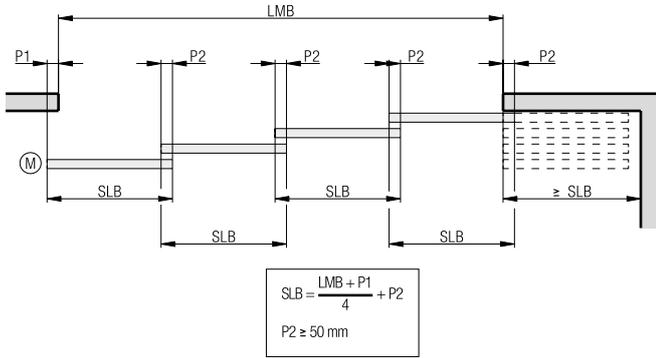


- AB = System width
- LMB = Inside clearance
- SLB = Sliding shutter width
- P = Sliding shutter overlap
- LS1 = Inner running track
- LS2 = Outer running track
- FS = Guide track
- M = Minimum space for drive unit

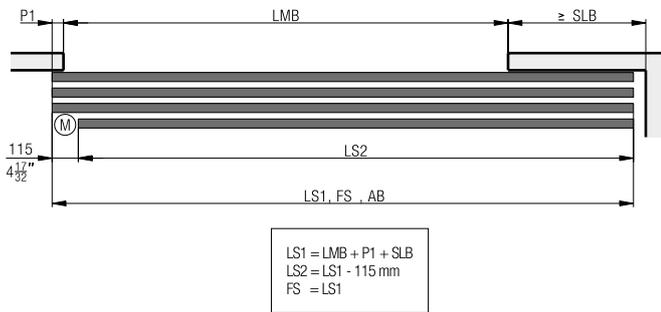


**Suspension points**

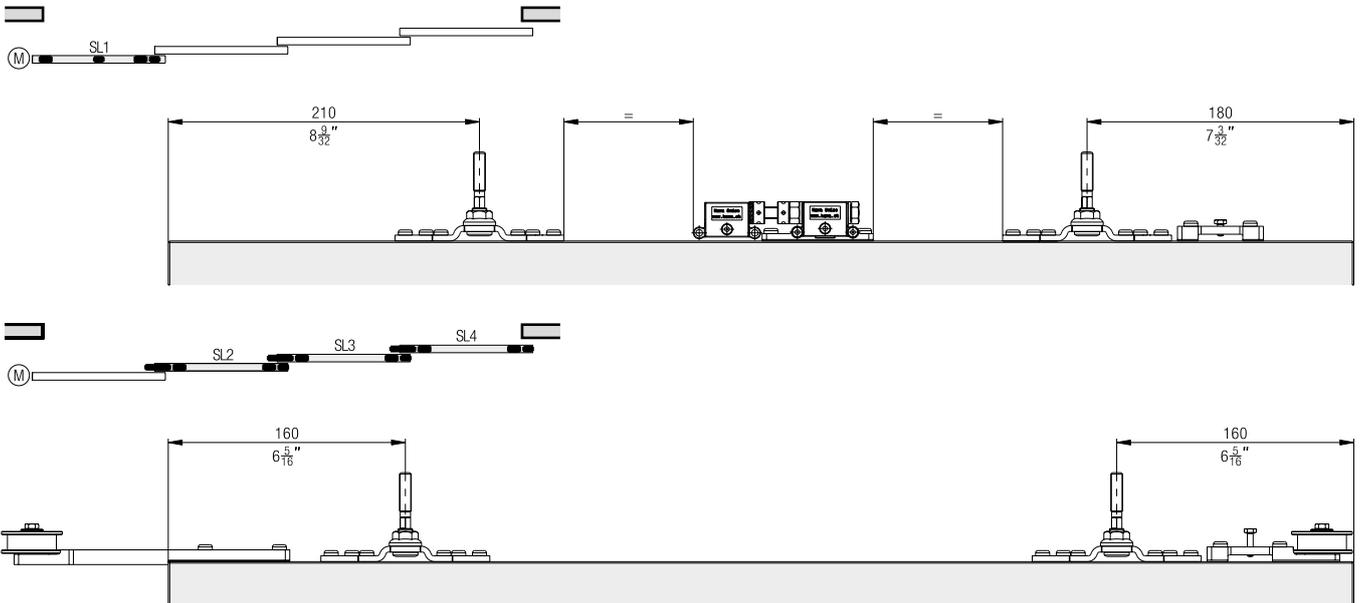

Guides

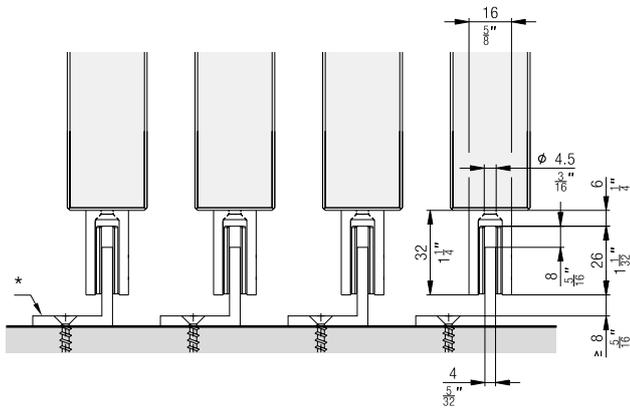

\* to be provided by customer

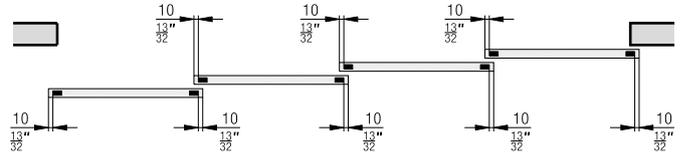

**Planning/execution**

- Corrosion resistance class 4 in accordance with EN 1670 (very good resistance)
- Wind resistance class overview from page 198

Further information about the product can be found on [www.hawa.com](http://www.hawa.com).