

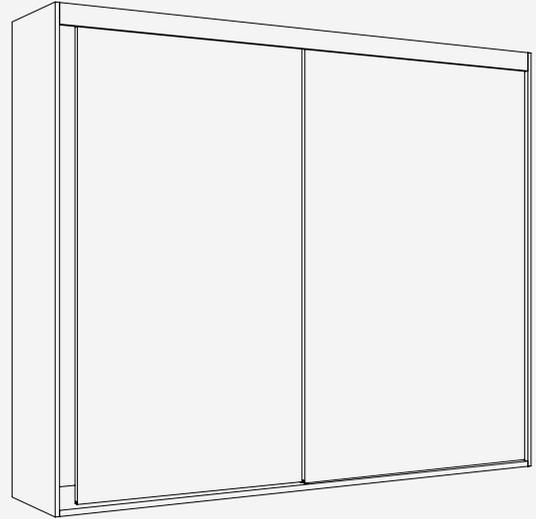
Fitting for 2–3 top-running wooden doors up to 65 kg (143 lbs.) with screwed on running track. Optional soft close integrated in track. Design Inside top-running

Product highlights

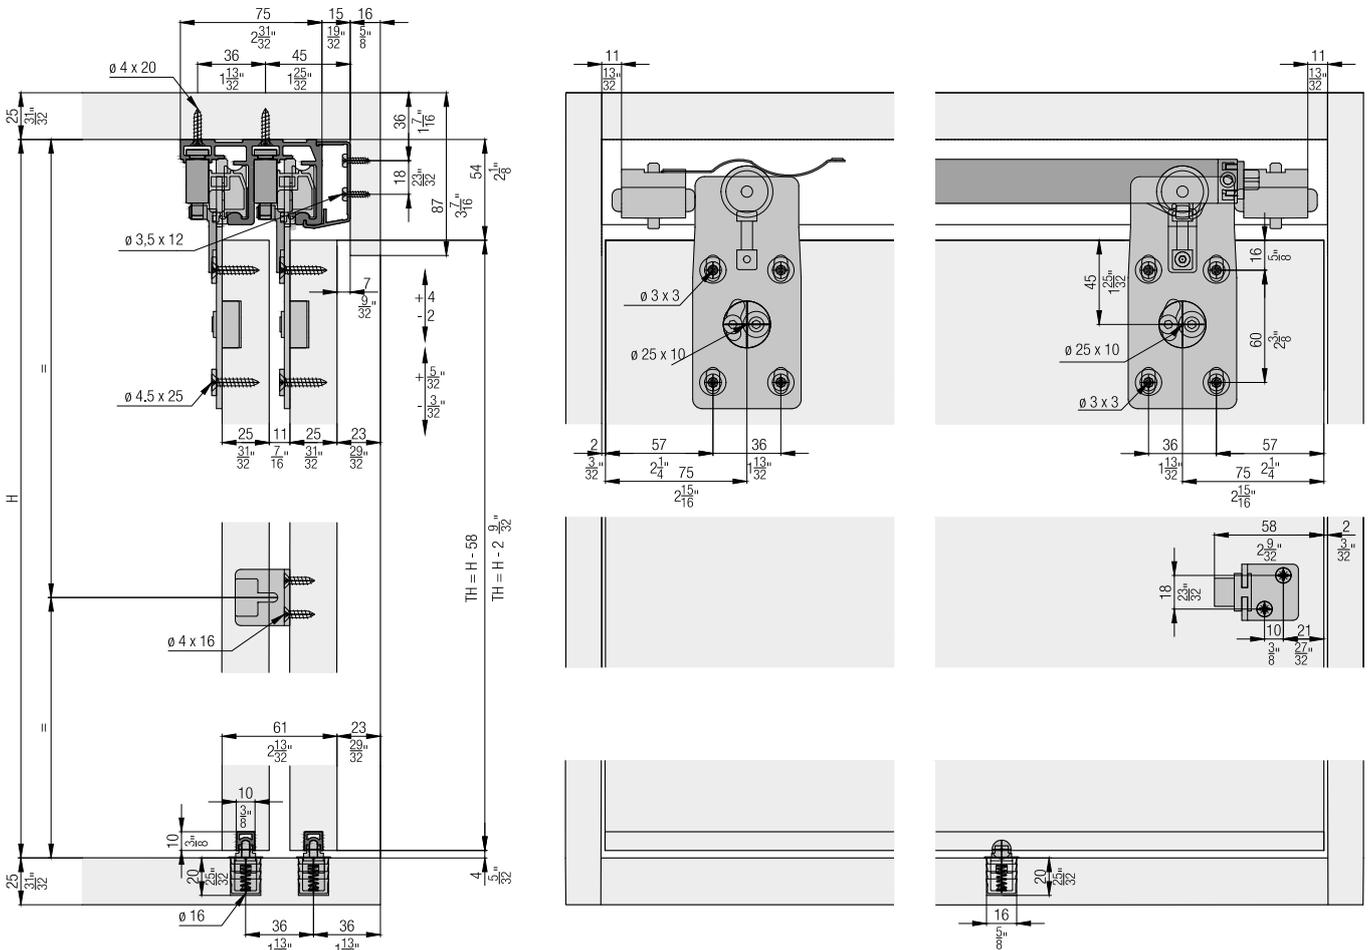
-  **Comfort** Smooth, silent running with Hawa Comfort roller
-  **Comfort** Sophisticated soft closing system and innovation arrangement of the components for very easy operation

Technical specifications

-  Max. 65 kg (143 lbs.)
-  Max. 2600 mm (8'6 3/8")
-  Max. 1400 mm (4'7 1/8")
-  Min. 25–40 mm (31/32" to 1 9/16")



Installation examples



Set for 2 or 3 wooden doors

	Nr.
Hawa Combino 65 H IS, door thickness 25–40 mm (31/32"-1 9/16"), for 2 doors	055.3202.071
Hawa Combino 65 H IS, door thickness 25–40 mm (31/32"-1 9/16"), max. door width 1350 mm (4'5 5/32"), for 3 doors	055.3202.072





Set consisting of:

	055.3202.071	055.3202.072	Nr.
 Running gear, steel, zinc-plated	4	6	055.3152.071
 Bottom guide, plastic, gray	2	3	055.3081.071
 Stopper, plastic, gray	4	4	055.3153.071
 Retention spring for stopper, steel	2	3	055.3190.071
 Door follower, with 2 doors, steel, zinc-plated	1		055.3124.071
 Centering disk, plastic, white	16	24	055.0110.001
 Countersunk head screw, 4.5x25 mm, steel, zinc-plated	16	24	766.5045.125
 Thread-cutting rounded head screw, M4x8 mm, steel, zinc-plated	2	3	762.7009.100
 Buffer, with adhesive, 2-piece set	1		053.3364.051


Track sets, 25 mm (31/32")

	Nr.
Hawa Combino 65 H IS, 2500 mm (8'2 7/16")	055.3208.071
Hawa Combino 65 H IS, 4000 mm (13'1 15/32")	055.3208.072


Set consisting of:

	mm (inch)	055.3208.071	055.3208.072	Nr.
 Double running track, aluminum, anodized, pre-drilled	2500 (8'2 7/16")	1		055.3143.250
 Guide track, plastic, gray, for glue fixing	2500 (8'2 7/16")	1		055.3171.250
 Double running track, aluminum, anodized, pre-drilled	4000 (13'1 15/32")		1	055.3143.400
 Guide track, plastic, gray, for glue fixing	1450 (4'9 3/32")		3	055.3171.145

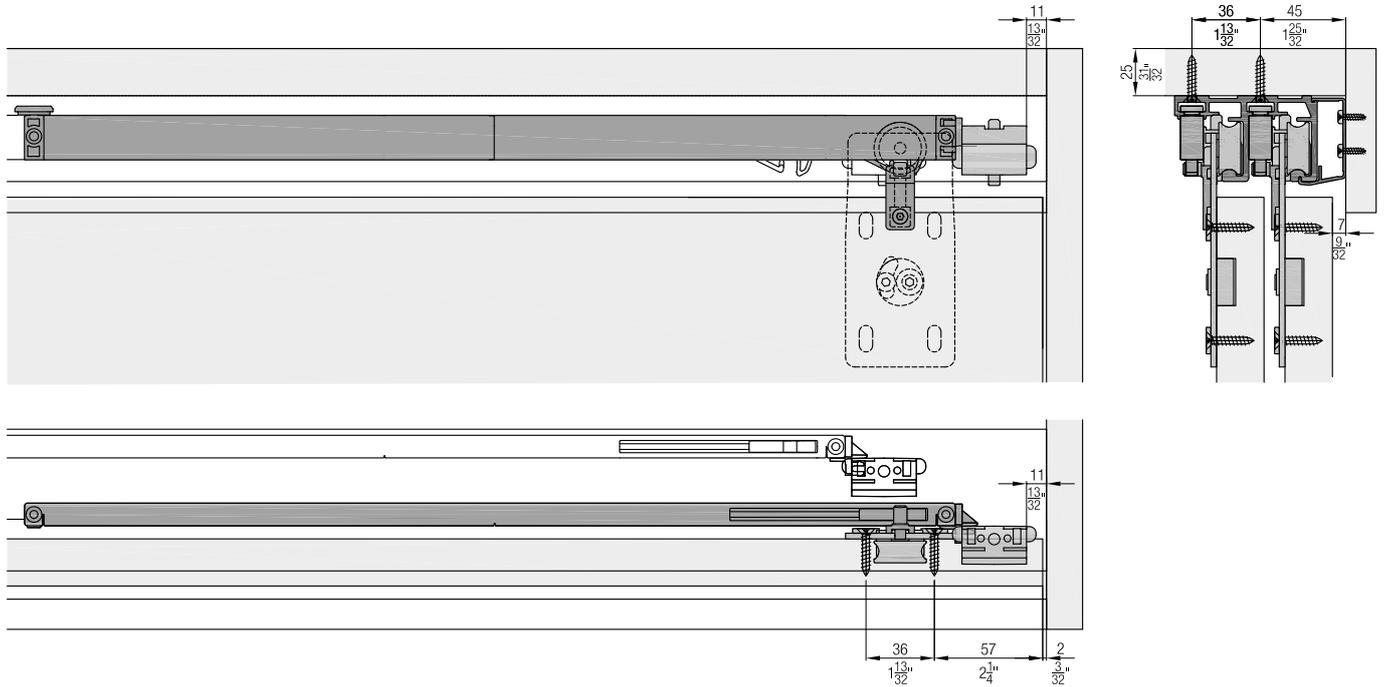
Running tracks, from a door thickness of 28 mm (1 3/32")

	mm (inch)	Nr.
 Single running track, aluminum, anodized, pre-drilled	2500 (8'2 7/16")	055.3162.250
	4000 (13'1 15/32")	055.3162.400

Guide tracks

	mm (inch)	Nr.
 Guide track, plastic, gray, for glue fixing	2500 (8'2 7/16")	055.3171.250
	3500 (11'5 25/32")	055.3171.350
	6000 (19'8 7/32")	055.3171.600

Soft close



Accessories

- Straightening fitting from page 265
- Order overview soft close from page 270

Planning/execution

Further information about the product can be found on www.hawa.com.