

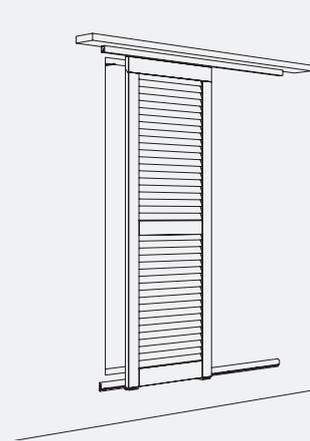
Fitting for top-running wooden or metal shutters up to 100 kg (220 lbs.), with low running track. Ceiling or architrave mounting.

Product highlights

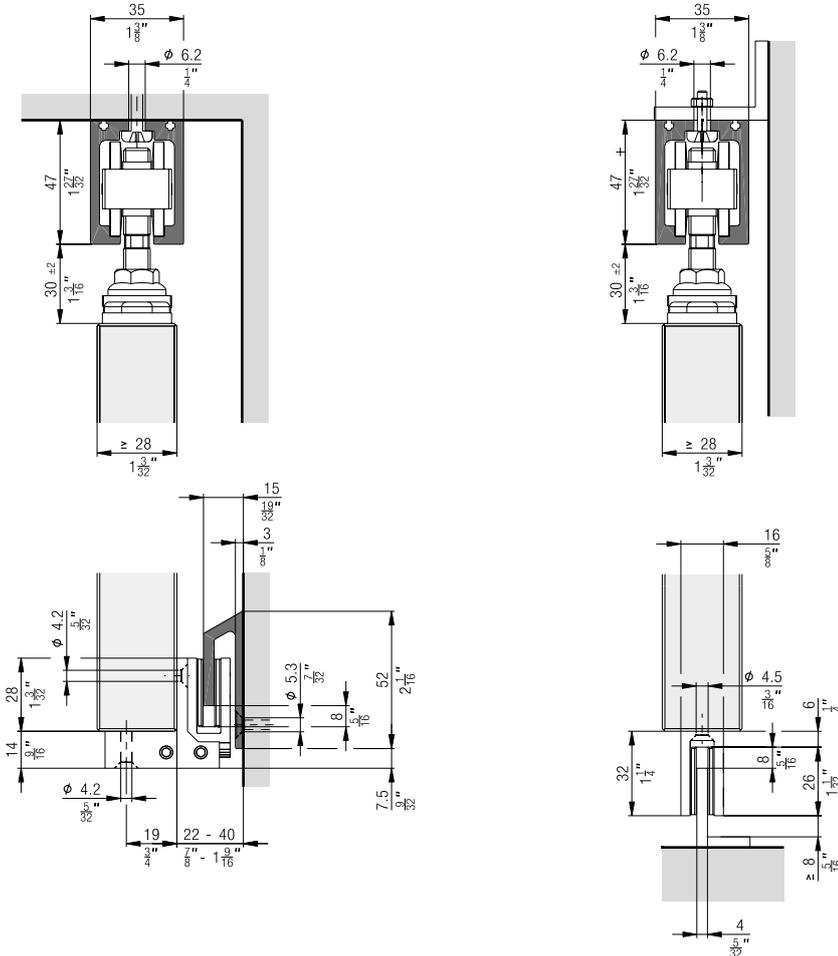
- 👁 **Aesthetics** Minimal rail height
- 👁 **Aesthetics** Attractive design solution for exciting and modern façade design

Technical specifications

- ⚖ Max. 100 kg (220 lbs.)
- 📏 Max. 3200 mm (10' 5 31/32")
- 📏 500–3750 mm (1' 7 11/16" to 12' 3 5/8")
(Max. shutter area 9.6 m² (103 ft²))
- ➡️ ≥28 mm (1 3/32")






Installation examples




Set for 1 sliding shutter up to 100 kg (220 lbs.)

	No.
Hawa Frontslide 100 A, for 1 sliding shutter for lower top track	25124

Set consisting of:

	25124	No.
 Two-wheeled running gear, M10, plastic wheels	2	24552
 Top fixing plate, with suspension bolt M10 for lower running track, stainless steel	2	25051
 Track stop with adjustable retainer	2	24834


Running tracks

	mm (inch)	No.	
	Lower running track, aluminum, anodized, pre-drilled	2500 (8' 2 7/16")	24843
		6000 (19' 8 7/32")	24804
	Lower running track to measure, aluminum, anodized, pre-drilled	cut to size	24805



Connecting pins for running tracks

	No.
 Connecting bolts, 6-piece set	17221

Guide tracks

	mm (inch)	No.	
	Guide track, aluminum, anodized, pre-drilled	6000 (19' 8 7/32")	24460
		cut to size	24462

Guides

	No.
 Floor guide unit, short, for guide track	24543
 Floor guide unit, long, for guide track	24544
 Guide slider, for screw fixing	24542

