

SLIDING DOOR SPIDER

ST.1033.SP

Premium Edition





SPIDER ST.1033.SP

Premium Edition

The Spider system represents “Retrodesign” at its best. Regarding form, function and manufacturing complexity it represents the top of MWE’s premium edition. All pieces of this unique system are manually milled from solid stainless steel and afterwards extensively polished or ground by hand.

Technical details:

You will find further information all the technical details for this product




www.mwe-tuersysteme.de

More about MWE and all products


www.mwe.de

Overview:

- + Runs smoothly thanks to rail of solid material
- + Suitable for glass, wood, metal or plastic door leaves
- + Ideal stability for public areas due to three point holders
- + Available with MWE soft stop technology
- + Synchronous technology
- + Door leaf weight up to 205 kg




Technical Details from Spider
Sliding Doors with top rollers

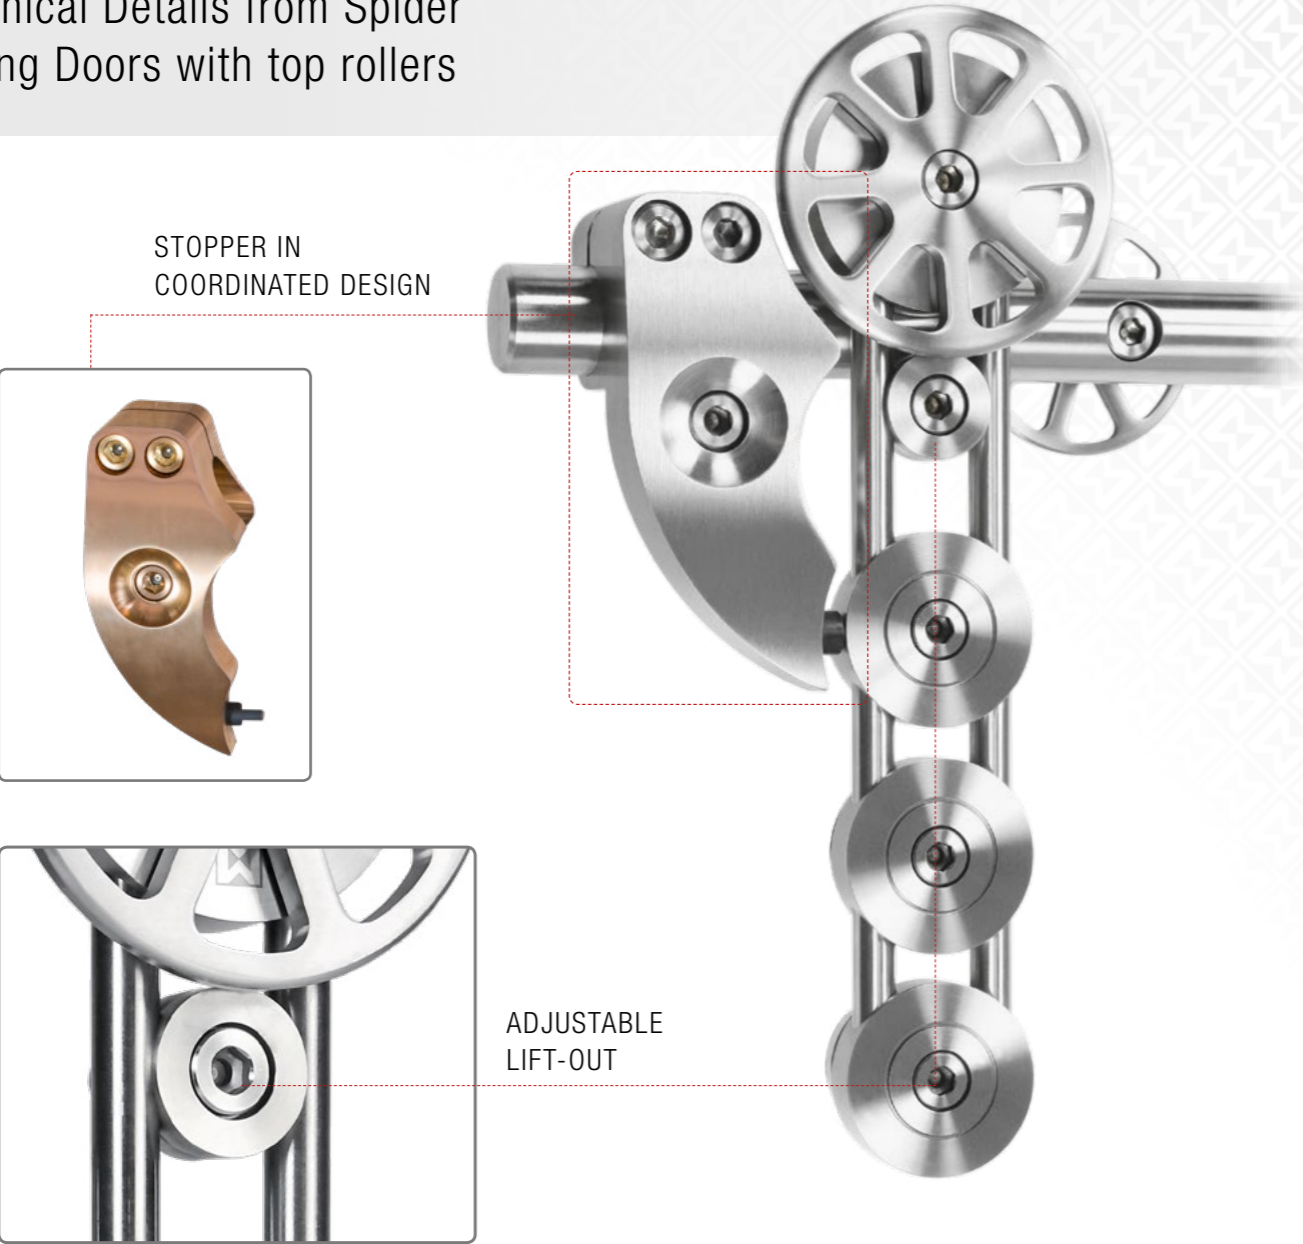



RAILS MADE OF SOLID STAINLESS STEEL

- + Virtually silent running, solid material does not generate resonances
- + High load capacity of the entire construction (e.g. for partition walls, glass cabins, skylights)

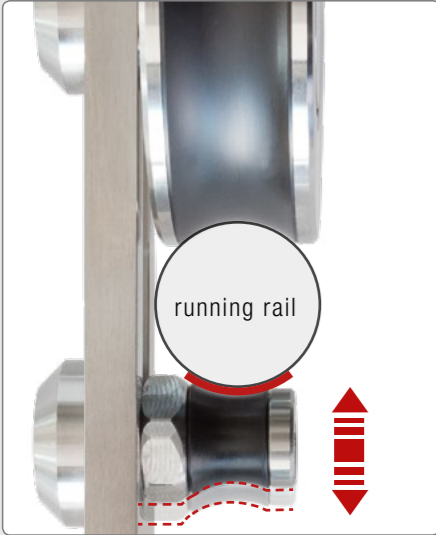


ADJUSTABLE LIFT-OUT

- + Perfect runnability guaranteed - by the construction as a rolling body
- + Perfectly adjustable by eccentric bore
- + Very high stability due to the basic structure made of stainless steel

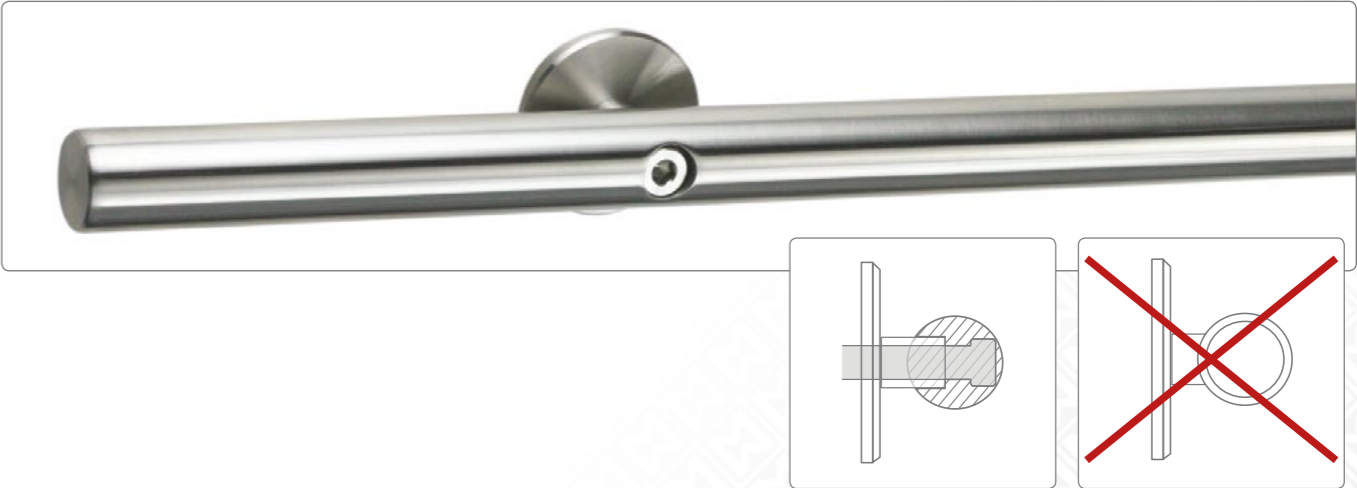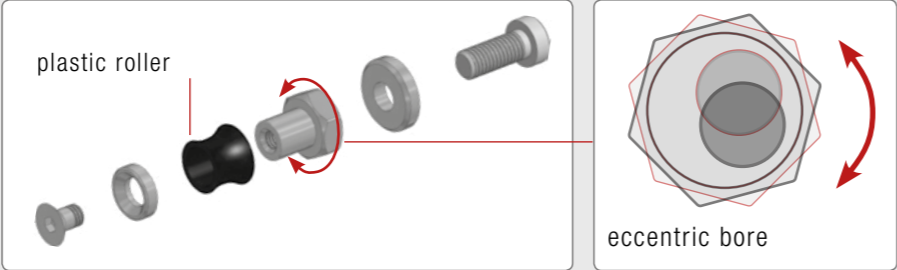

ST.2000

Round Rail Ø 25 mm

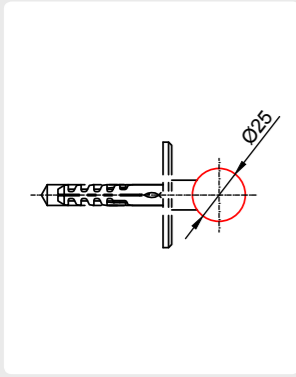


Ø 50 mm wall rosette

for sliding systems: ProTec, Klassik, Supra, Twin, Duplex, Duplex S, Vario, Spider and Chronos – incl. Drilling


ST.3600

MWE-Soft-Stop for Round Rail Ø 25 mm

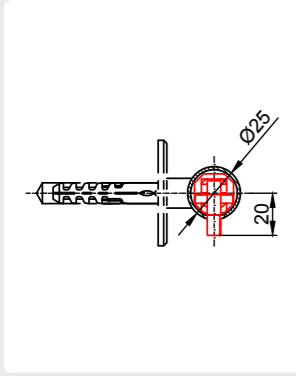


for sliding door systems: ProTec, Klassik, Supra, Duplex, Duplex S, Twin, Spider and Chronos

Wall Mount for Round Rail

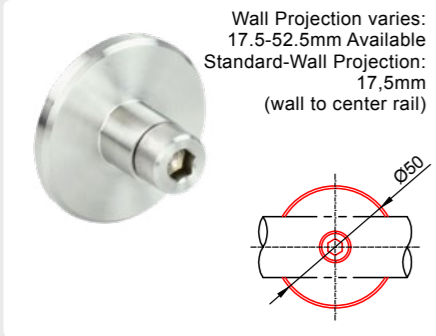


ST.2100

Glass Mount for Round Rail

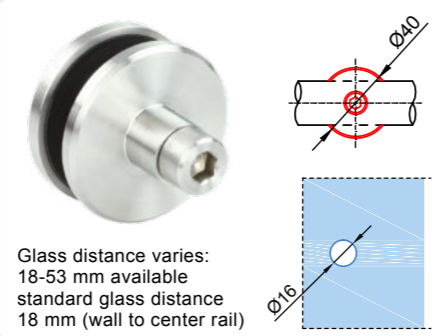


ST.2170

Glass Mount for Double Round Rail

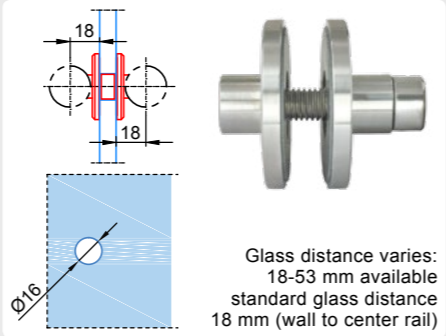


ST.2174

Wall Mount for Round Rail

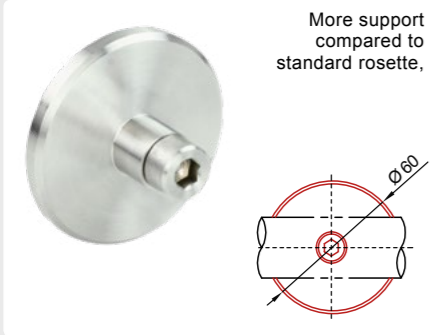


ST.2100.60

Wall Mount for System Spider

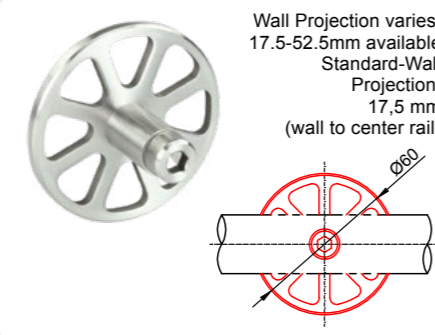


ST.2100.SP

Wall Mount for System Chronos

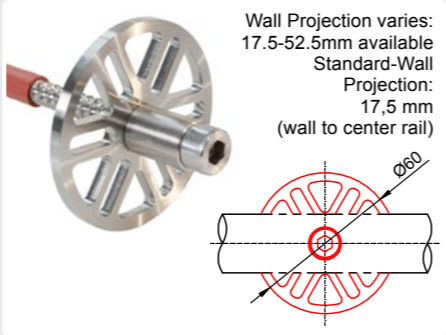


ST.2100.CH

3pcs. set wall shims, 1/2/3 mm

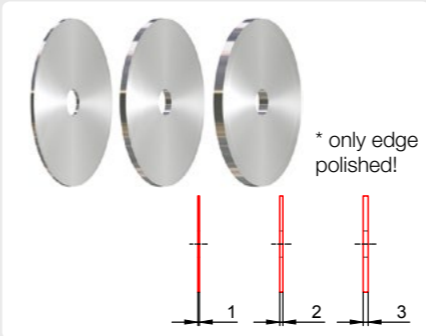

ST.2050


Ceiling Mount with height adjustability

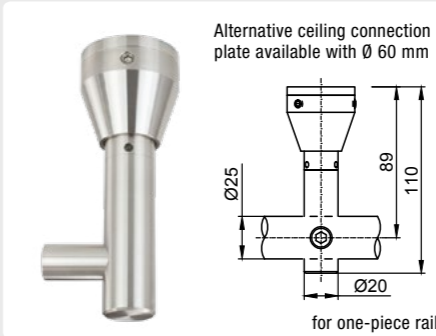

ST.5001

+/- 4 mm Height adjustment after assembly!

Ceiling Mount without height adjustability

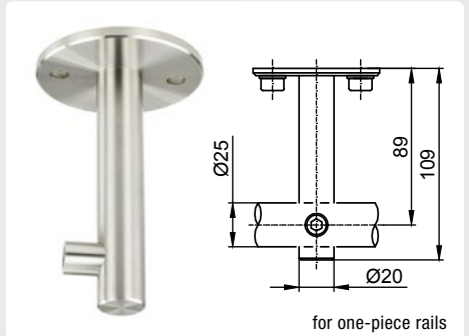

ST.5003


Corner rail connector



ST.2090.V

With angle adjustment!


Connector for multi-part rail

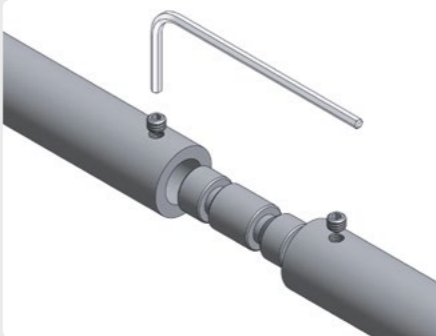

ST.2025


or Ø 25 mm Rail

Front end rail mount - for perpendicular walls

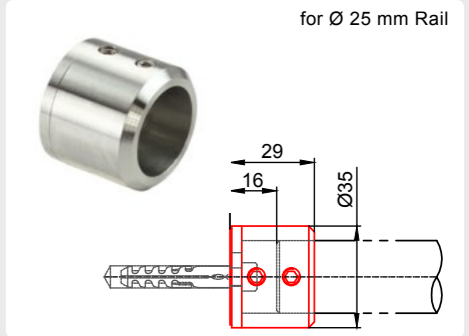


ST.5035

Offset distance of 16 mm required

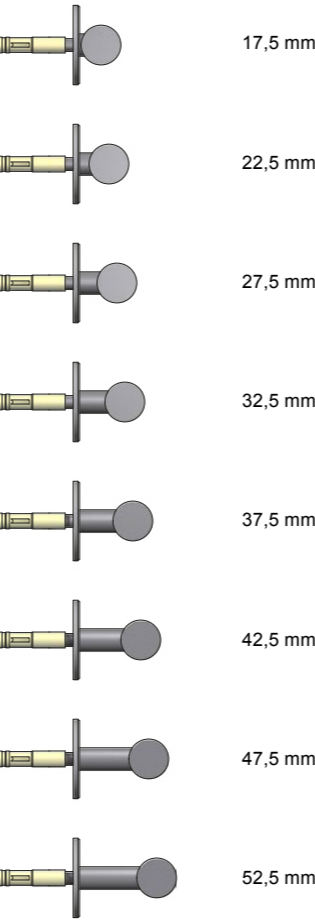

Various projection lengths are available to allow for baseboard and/or casing available in 5 mm increments!

Wall projection!
Standard wall projection 17.5 mm
(wall to center rail) 17.5-52.5mm available

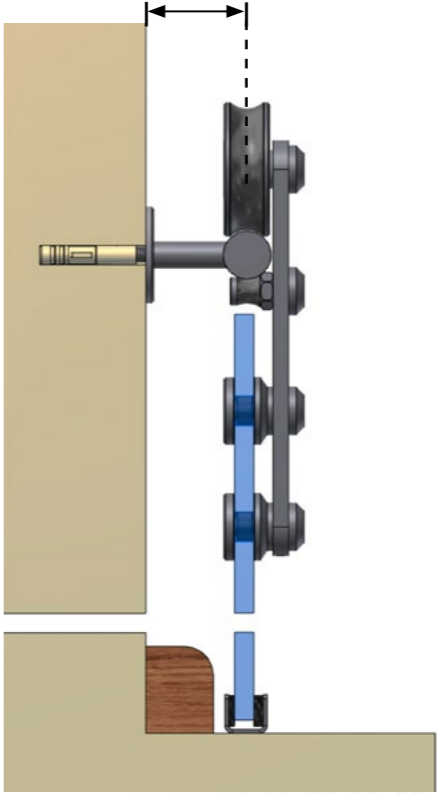

Wall mounting screws - wood thread with cylinder head!


NEW!



Standard Wall mount (included in the wall to center rail): M8 cylinder head bolt ZK8.100.HD with wood thread, Fischer-UX Ø 10 mm, 80, 100 and 120 mm



Alternative Wall mount Screws:
M8 cylinder head bolt with metric thread and gypsum wall metal dowel. for single or double plasterboard - please specify!

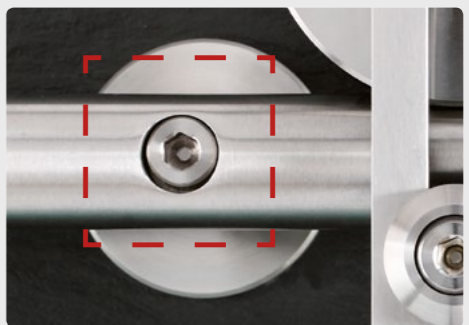



Double sliding doors that can be opened with one hand ...

Our synchronous technology uses a wire connection to enable the simultaneous opening of double doors in opposite directions. This sophisticated engineering is matched by the appealing design of the synchronous hardware, which deliberately showcases the complex mechanism.





