

**Fitting for 2-3 top-running wooden doors up to 35 kg (77 lbs.), with screwed on running track and wooden or aluminum clip panel. Soft close optional. Design Mixslide.**

## Product highlights




## Comfort

High operating convenience thanks to proven running system and optional soft closing technology



## Productivity

No cabinet processing, high degree of pre-assembly and access from the front for easy, quick installation

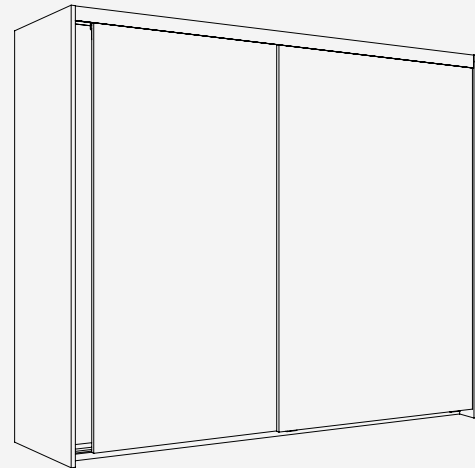

## Technical specifications



Max. 35 kg (77 lbs.)



Max. 2200 mm (7'2 5/8")









Max. 1200 mm (3'11 1/4")



19 mm (3/4")











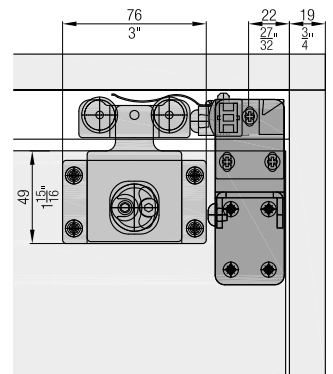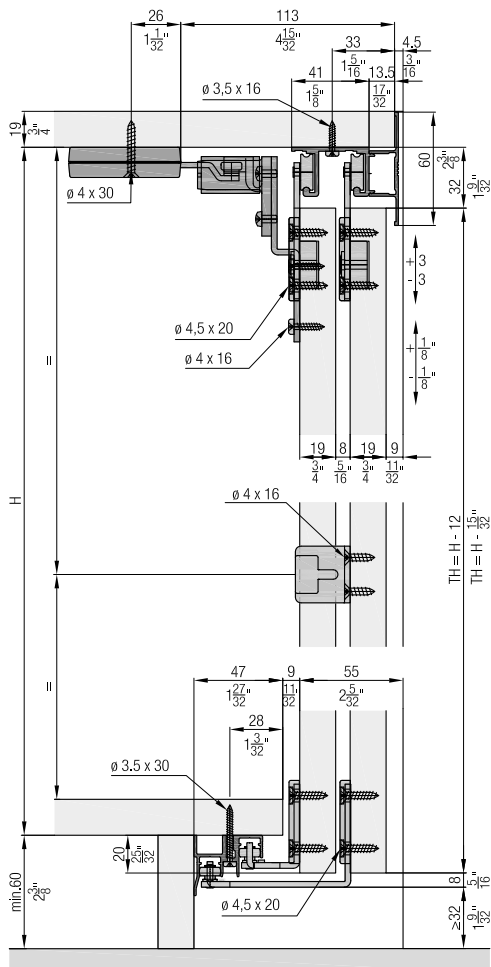


## Installation examples





**Set for 2 or 3 wooden doors**

	Nr.
Hawa Combino 35 H MS, for 2 doors	056.3181.073
Hawa Combino 35 H MS, for 3 doors	056.3181.074


**Set consisting of:**

		056.3181.073	056.3181.074	Nr.
	Running gear, steel, zinc-plated	4	6	056.3177.171
	Running gear housing, plastic, anthracite	4	6	056.3175.001
	Guide bracket, interior door, steel, zinc-plated	2	4	055.3107.171
	Guide bracket, exterior door, steel, zinc-plated	2	2	055.3108.171
	Guide bracket housing, plastic, anthracite	4	6	053.3064.001
	Stopper, plastic, gray	2	1	056.3189.071
	Stopper, with retention spring, plastic, gray	2	3	056.3189.072
	Stopper guide, plastic, gray	4	4	040.3079.074
	Door follower, with 2 doors, steel, zinc-plated	1		055.3124.071
	Countersunk head screw, 4.5x20 mm, steel, zinc-plated	32	48	600.0000.167
	Buffer, with adhesive, 3-piece set		1	061.3083.050
	Door follower, with 3 doors, steel, zinc-plated		2	055.3126.171
	Thread-cutting rounded head screw, M4x8 mm, steel, zinc-plated		2	600.0000.328


**Running tracks**

		mm (inch)	Nr.
	Single running track, aluminum, pre-drilled	2500 (8'2 7/16")	056.3011.250
		3500 (11'5 25/32")	056.3011.350
		6000 (19'8 7/32")	056.3011.600
	Double running track, aluminum, pre-drilled	2500 (8'2 7/16")	056.3010.250
		3500 (11'5 25/32")	056.3010.350
		6000 (19'8 7/32")	056.3010.600

**Guide tracks**


		mm (inch)	Nr.
	Double guide track, aluminum, anodized, pre-drilled	2500 (8'2 7/16")	056.3072.250
		3500 (11'5 25/32")	056.3072.350
		6000 (19'8 7/32")	056.3072.600

**Panels**

		mm (inch)	Nr.
	Clip-on panel, aluminum, anodized	2500 (8'2 7/16")	056.3174.250
		3500 (11'5 25/32")	056.3174.350
		6000 (19'8 7/32")	056.3174.600



**Soft close (only for system with 2 doors)**

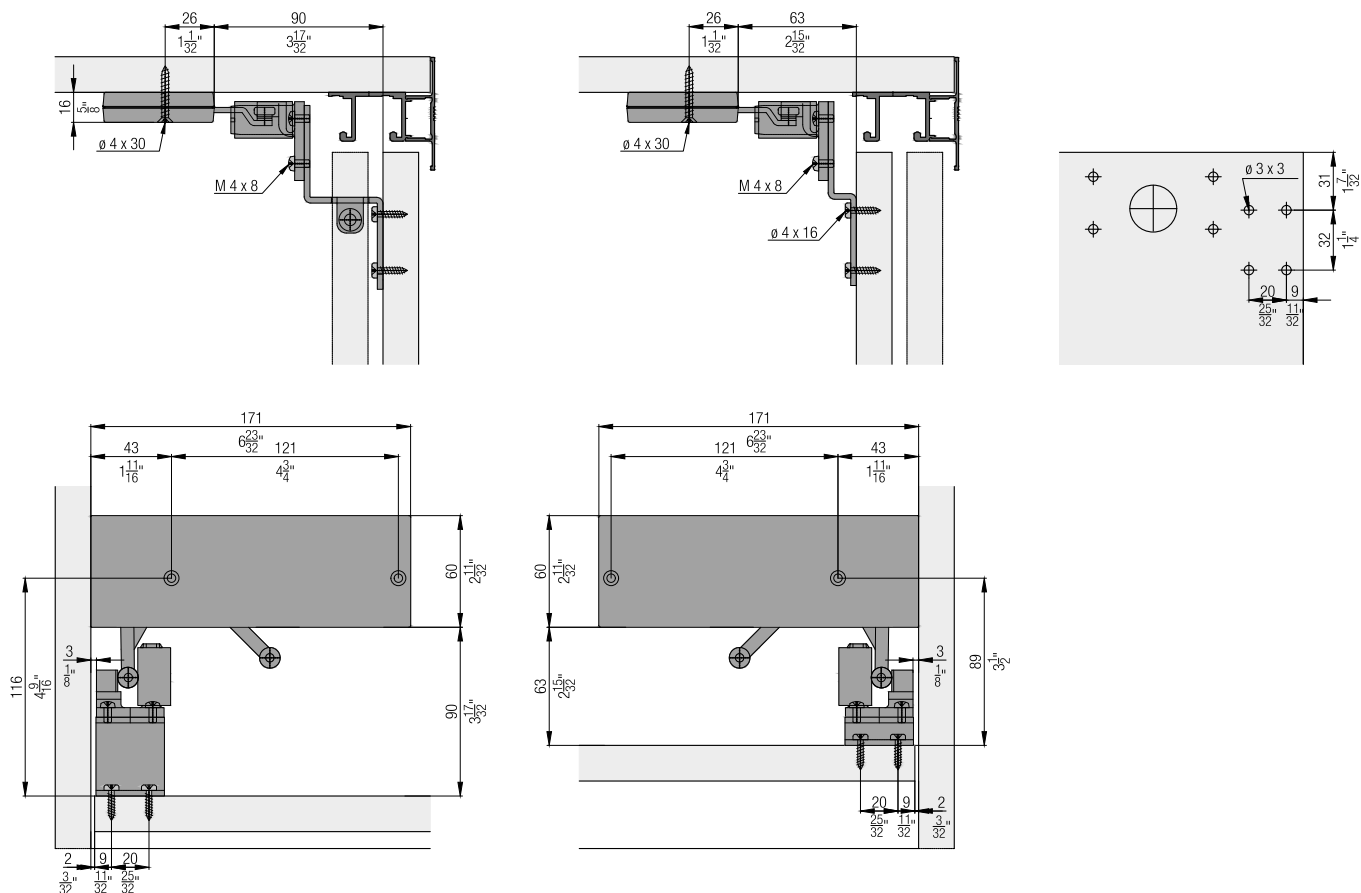

**Accessories**

- Straightening fitting from page 265
- Handle profiles from page 268
- Order overview soft close from page 270

**Planning/execution**

Further information about the product can be found on [www.hawa.com](http://www.hawa.com).