

Fitting for 2–3 top-running wooden doors up to 65 kg (143 lbs.) with screwed on running track. Optional soft close integrated in track. Design Mixslide top-running.

Product highlights



Comfort

Smooth, silent running with Hawa Comfort roller



Comfort

Sophisticated soft closing system and innovation arrangement of the components for very easy operation

Technical specifications



Max. 65 kg (143 lbs.)




Max. 2600 mm (8'6 3/8")






Max. 1400 mm (4'7 1/8")



25 mm (31/32")

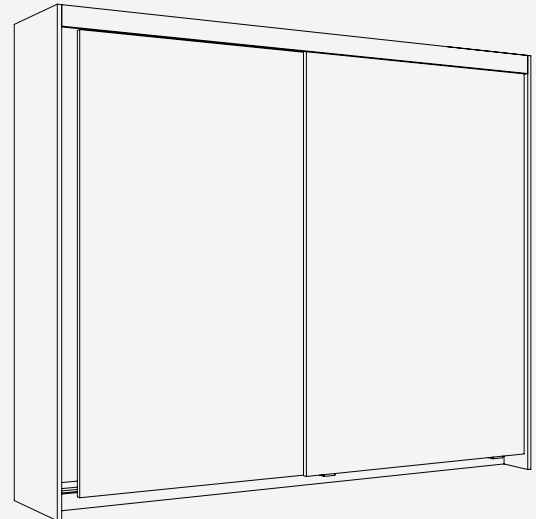








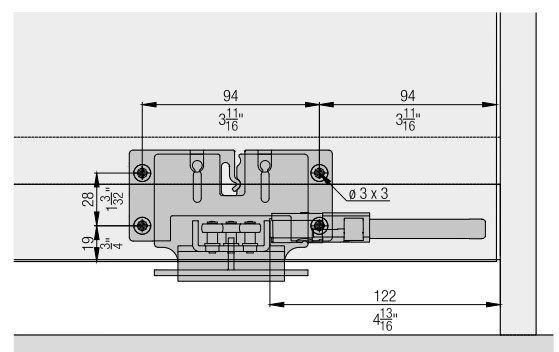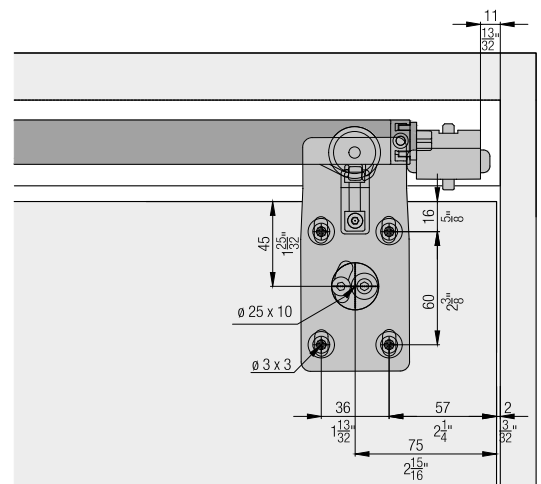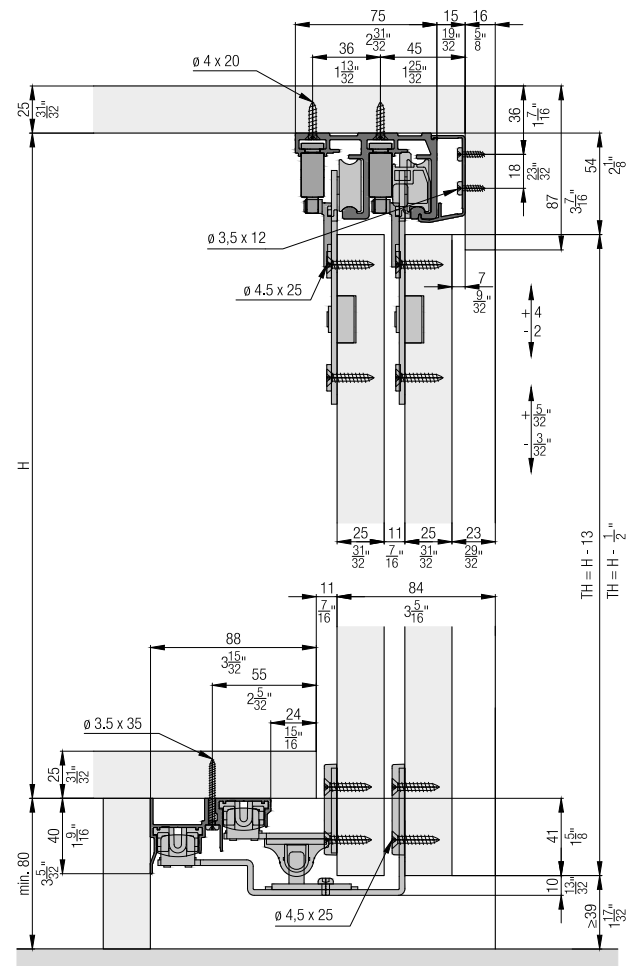







Installation examples



Set for 2 or 3 wooden doors

	No.
Hawa Combino 65 H MS, door thickness 25 mm (31/32"), for 2 doors	055.3203.071
Hawa Combino 65 H MS, door thickness 25 mm (31/32"), max. door width 1340 mm (4'3/4"), for 3 doors	055.3203.072





Set consisting of:

		055.3203.071	055.3203.072	No.
	Running gear, steel, zinc-plated	4	6	055.3152.071
	Guide bracket, interior door, steel, zinc-plated	2	4	055.3136.071
	Guide bracket, exterior door, 25 mm (31/32"), steel, zinc-plated	2	2	055.3137.071
	Guide bracket housing, plastic, anthracite	4	6	055.0237.001
	Stopper, plastic, gray	4	4	055.3153.071
	Retention spring for stopper, steel	2	3	055.3190.071
	Stopper guide, plastic, gray	4	4	055.3135.071
	Door follower, with soft close, plastic, gray	1	2	055.0268.001
	Activator, for door follower, steel, zinc-plated	1	2	055.0238.101
	Centering disk, plastic, white	16	24	055.0110.001
	Countersunk head screw, 4.5x25 mm, steel, zinc-plated	32	48	766.5045.125
	Thread-cutting rounded head screw, M4x8 mm, steel, zinc-plated	2	3	762.7009.100
	Thread-cutting rounded head screw, M4x6 mm, steel, zinc-plated	1	2	762.7009.107
	Thread-cutting countersunk head screw, M3x6 mm, steel, zinc-plated	2	4	600.0000.789
	Buffer, with adhesive, 2-piece set	1		053.3364.051

Track sets

	No.
Hawa Combino 65 H MS, 2500 mm (8'2 7/16")	055.3209.071
Hawa Combino 65 H MS, 4000 mm (13'1 15/32")	055.3209.072

Set consisting of:





		mm (inch)	055.3209.071	055.3209.072	No.
	Double running track, aluminum, anodized, pre-drilled	2500 (8'2 7/16")	1		055.3143.250
	Double guide track, aluminum, anodized, pre-drilled	2500 (8'2 7/16")	1		055.3134.250
	Double running track, aluminum, anodized, pre-drilled	4000 (13'1 15/32")		1	055.3143.400
	Double guide track, aluminum, anodized, pre-drilled	4000 (13'1 15/32")		1	055.3134.400

Soft close



For soft closing in opening and closing direction order 2 sets.

	No.
Hawa Combino 65 H IS/MS, up to 65 kg (143 lbs.), 2 pieces	055.3214.071


Set consisting of:

		055.3214.071	No.
	Soft close, right, up to 65 kg (143 lbs.)	1	055.3149.071
	Soft close, left, up to 65 kg (143 lbs.)	1	055.3149.072
	Activator, for soft close	2	055.3156.071
	Thread-cutting head screw, M4x8 mm, steel, zinc-plated	2	600.0000.344



Accessories

	No.
	Soft close for guide (recommended from a door ratio bigger than 1:3. Can only be used with a soft close.)
	Clip-on component, for wooden panel, every 700-800 mm (2'3 9/16"-2'7 1/2"), aluminum, pre-drilled




Handle profile



Calculations

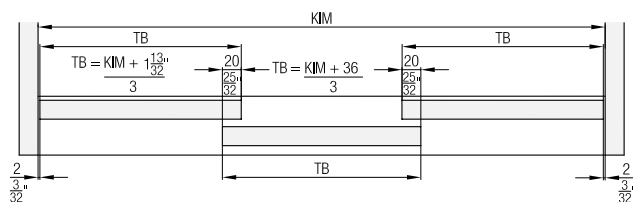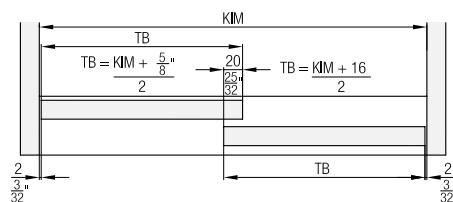

Soft close

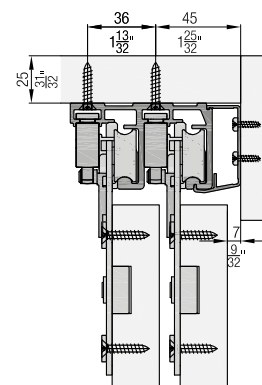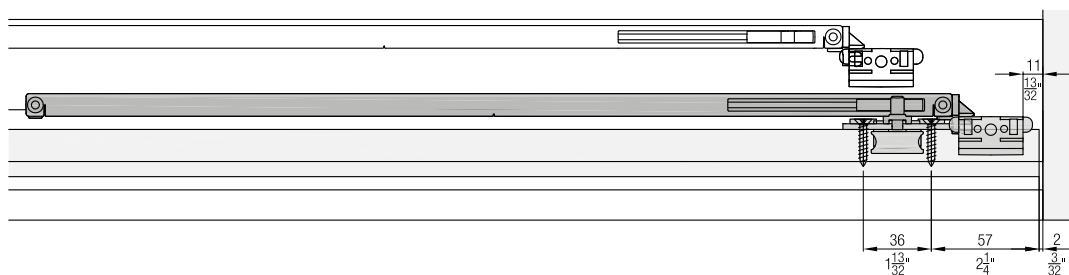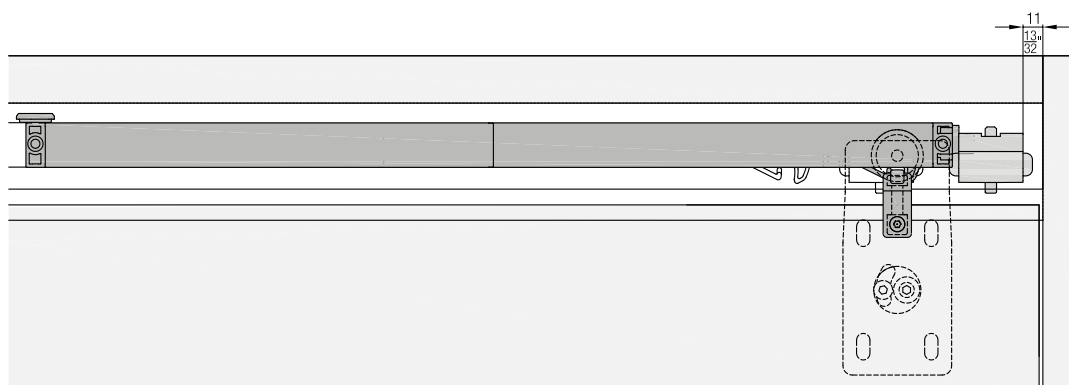

Accessories

- Straightening fitting from page 265
- Handle profiles from page 268
- Order overview soft close from page 270

Planning/execution

Further information about the product can be found on www.hawa.com.