Fitting for 2–3 bottom-running wooden doors (19/25 mm) up to 50 kg (110 lbs.) with screwed on running track. Design Forslide without soft close

Product highlights

Aesthetics Bottom-running system that supports the entire door

weight on the base makes cabinet designs with thin

materials possible

Comfort Smooth, silent running with Hawa Comfort roller


Technical specifications

Max. 50 kg (110 lbs.)


↑ Max. 2400 mm (7'10 7/16'')


★ Max. 1400 mm (4'7 1/8'')

↑ 19/25 mm (3/4'' or 31/32'')



Installation examples

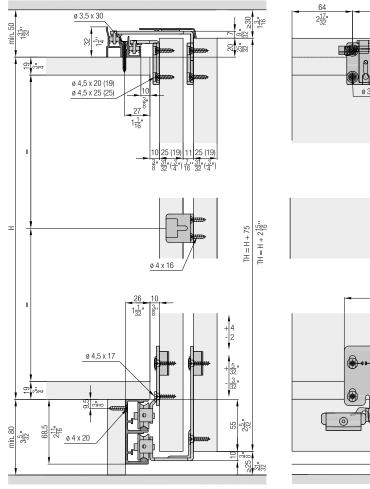

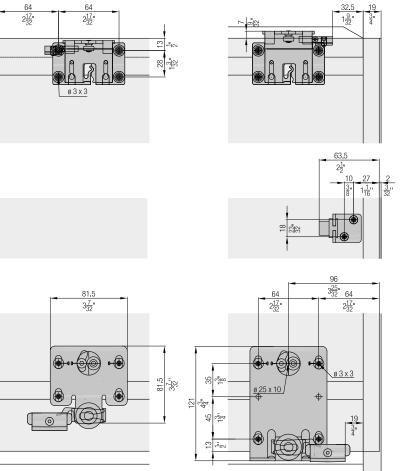

Set for 2 or 3 wooden doors, 19 mm (3/4")

	No.
Hawa Combino 50 H FS, door thickness 19 mm (3/4"), for 2 doors	055.3200.071
Hawa Combino 50 H FS, door thickness 19 mm (3/4"), for 3 doors	055.3200.073

Set consisting	of:	055.3200.071	055.3200.073	No.
8. 20. 0	Running gear, einerior door, steel, zinc-plated	2	4	055.3169.071
	Running gear, exterior door, 19 mm (3/4"), steel, zinc-plated	2	2	055.3113.175
	Guide bracket, interior door, steel, zinc-plated	2	4	055.3107.171
The state of the s	Guide bracket, exterior door, 19 mm (3/4"), steel, zinc-plated	2	2	055.3109.171
Callad	Guide bracket housing, plastic, anthracite	4	6	055.0282.001
	Stopper, plastic, gray	4	4	055.3167.071
	Retention spring for stopper, plastic, gray	2	3	055.0204.001
	Stopper guide, plastic, gray	4	4	040.3079.074
	Door follower, with 2 doors, steel, zinc-plated	1		055.3124.071
	Washer-and-screw assembly, 4.5x17 mm, steel, zinc-plated	16	24	055.0100.101
•	Countersunk head screw, 4.5x20 mm, steel, zinc-plated	16	24	600.0000.167
	Door follower, with 3 doors, steel, zinc-plated		2	055.3126.171
	Buffer, with adhesive, 2-piece set		1	053.3364.051
	Thread-cutting rounded head screw, M4x8 mm, steel, zinc-plated		2	600.0000.328

Set for 2 or 3 wooden doors, 25 mm (31/32")

	No.
Hawa Combino 50 H FS, door thickness 25 mm (31/32"), for 2 doors	055.3200.072
Hawa Combino 50 H FS, door thickness 25 mm (31/32"), for 3 doors	055.3200.074

Set consisting	of:	055.3200.072	055.3200.074	No.
	Running gear, einerior door, steel, zinc-plated	2	4	055.3169.071
والمالة المالة ا	Running gear, exterior door, 25 mm (31/32''), steel, zinc-plated	2	2	055.3114.175
	Guide bracket, interior door, steel, zinc-plated	2	4	055.3107.171
The state of the s	Guide bracket, exterior door, 25 mm (31/32"), steel, zinc-plated	2	2	055.3110.171
Callad	Guide bracket housing, plastic, anthracite	4	6	055.0282.001
	Stopper, plastic, gray	4	4	055.3167.071
	Retention spring for stopper, plastic, gray	2	3	055.0204.001
	Stopper guide, plastic, gray	4	4	040.3079.074
	Door follower, with 2 doors, steel, zinc-plated	1		055.3124.071
	Washer-and-screw assembly, 4.5x17 mm, steel, zinc-plated	16	24	055.0100.101
	Countersunk head screw, 4.5x25 mm, steel, zinc-plated	16	24	766.5045.125
	Door follower, with 3 doors, steel, zinc-plated		2	055.3126.171
	Buffer, with adhesive, 2-piece set		1	053.3364.051
	Thread-cutting rounded head screw, M4x8 mm, steel, zinc-plated		2	600.0000.328

Running tracks

| Double running track, aluminum, anodized, pre-drilled | Continued by the continued by the

Panels

		(inch)	No.
/ /	Cover panel, aluminum, anodized 2500 (8'2 7/16") 3500 (11'5 25/32") 6000 (19'8 7/32")	055.3130.250	
			055.3130.350
			055.3130.600


Guide tracks


	mm (inch)	No.
Double guide track, aluminum, anodized, pre-drilled	2500 (8'2 7/16'')	056.3072.250
	3500 (11'5 25/32'')	056.3072.350
	6000 (19'8 7/32'')	056.3072.600

Accessories


Intermediate stop set, for 3 doors	No.
loi 3 doors	055.3218.071

Calculations







Optional: Guide track installation from below




Intermediate stop with 3 doors





Handle profiles



Accessories

- Straightening fitting from page 265
- Handle profiles from page 268

Planning/execution

Further information about the product can be found on www.hawa.com.