



## Construction

48

Designs incorporating inlaying and overlaying doors are possible.







# Description

The Hawa Multifold 30 W is a supplement to the Hawa Multifold 30 with inlaying or full overleay sliding cabinet doors. It is attached on one side with concealed hinges and does not need a bottom guide. The hardware can be used for sliding to the left and right.


# **Applications**


For use in interiors wherever quality and simple operation are required together with extremely smooth and stable motion, e.g. interior design, hotels, etc.

#### Features of the Hawa Multifold 30 W

- Maximum panel weight 30kg (66 lbs.) per panel pair 60 kg (132 lbs.)
- Maximum panel heights 2600 mm (8'6<sup>3</sup>/<sub>8</sub>")


- Panel widths 200–500 mm  $(7\frac{7}{8}"-1)^47\frac{1}{16}")$  Panel thicknesses 19–25 mm  $(\frac{3}{4}"-\frac{63}{64}")$  Vertical groove width 3–5 mm  $(\frac{1}{8}"-\frac{13}{164}")$  Vertical adjustement  $\pm$  2 mm  $(\frac{3}{32}")$

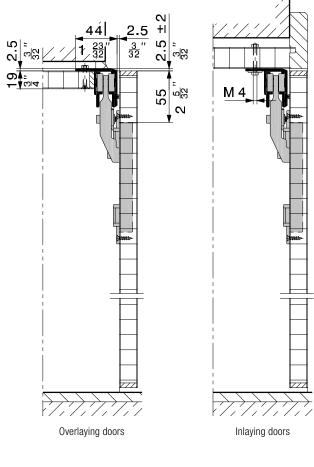



Subject to modification. Metric specifications are exact. Inches are approximate.

## Arrangement and number of hinges



On the outer side commercially available concealed spring-loades hinges for inset doors,  $\le 120^\circ,$  may be used


#### Sets

	panel	code
Hawa Multifold 30 W, Set for «walk-in cabinet», <b>with</b> top track	2	15569
Hawa Multifold 30 W, Set for «walk-in cabinet», <b>without</b> top track	2	18286

#### **Set comprising**

Caution: Hole position:	s vary	15569	18286	code
	Trolley with 2 plastic tyred wheels and 2 guide rollers	1	1	15032
	Suspension unit	1	1	15029
	Sef of countersunk head pressure screws 4 x 16 mm ( $\frac{5}{32}$ " x $\frac{5}{8}$ "), 6-piece set	1	1	14172
	Set of fixing screws, 3-piece set	1	1	15657
	Centre hinge, dull nickel finish, with fixing screws	4	4	15041
<b>*</b>	Door catch, plastic black, with fixing screws	1	1	15033
	Retaining bumper on top	1	1	14960
	Panel surface equaliser, plastic black, 2-piece set	1	1	14906
	Surface equalizer for side wall	1	1	17266
	Top track 1100 mm (3'7 5"), alu plain anodized, predrilled, with brush seal	1	_	15014

# Vertical sealing profile



Grooves for vertical sealing profile

## Vertical profiles, styrene-butadiene rubber (SBR)

			code
	Seal profile, white, similar RAL 9010	5-m roll (16'4 <sup>27</sup> ")	15227
	Seal profile, black, similar RAL 9011	5-m roll (16'4 <sup>27</sup> / <sub>32</sub> ")	15224

#### Top tracks

Caution: Hole positions	s vary	mm/inch	code
anod	Top track, alu plain anodized, predrilled,	1100 (3'7 5 ")	15014
		1800 (5'10 <sup>7</sup> / <sub>8</sub> ")	15015
	with brush seal	2500 (8'2 <sup>7</sup> / <sub>16</sub> ")	15016
		6000 (19'8 <sup>7</sup> / <sub>32</sub> ")	15288

## **Accessories**

			code
	Concealed hinge, dull nickel finish, 110° (inset panels)		14528
	Concealed hinge, dull nickel finish, 120° (overlaying panels)		15059
Furniture bar bolt lock, 27/110/8 mm $(1\frac{1}{16}^{\prime\prime}/4\frac{61}{64}^{\prime\prime}/\frac{6}{16}^{\prime\prime\prime})$ , nickel finish, with 1 EURO key, 2 half-round rods, 1500 mm $(4^{\prime}11\frac{1}{16}^{\prime\prime})$ strike plates (simultaneous locking)	left	20875	
	right	20876	
	Furniture bar bolt lock, 27/110/8 mm $(1\frac{1}{16}"/4\frac{3}{6}"/\frac{9}{6}")$ , nickel finish, with Kaba-8-cylinder (length 25 mm $[\frac{80}{64}"]$ ) 1 press-fit sleeve, 2 keys, 2 half-round rods, 1500 mm (4'11 $\frac{1}{16}"$ ), rod guides and strike plates (separate locking)	left	20873
		right	20874
	Mortising template for cup recesses		14761

# Order specifications

- Type and number of set
- Number of rolls and type of vertical seal profiles
- Type and number of accessories
- Whether with or without mortising template

# Planning/installation

Please use for planning and execution the installation instructions code 15567. Each set contains installation instructions. (→ www.hawa.ch → Hawa Productfinder)