Fitting for pivoting and lateral sliding in of wooden doors up to 35 kg (77 lbs.). Uniform, flush front design with even gap pattern. Push-to-open function for handle-less cabinet designs.

Proc	duct highlights	
	Productivity	Easy installation thanks to high degree of pre-assembly with intuitive adjustment
Ŷ	Comfort	Ergonomic movement support for even, smooth movement
٢	Aesthetics	Cabinet designs without handle – the technology remains invisible


Technical specifications

\triangle	10–35 kg (22 to 77 lbs.)
${}_{\downarrow}^{\uparrow}[]$	1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')
$\leftarrow \rightarrow$	440–750 mm (1' 5 5/16'' to 2' 5 17/32'')
→[]←	18–26 mm (23/32'' to 1 1/32'')




Installation examples

Door striking against the top and bottom cabinet sections

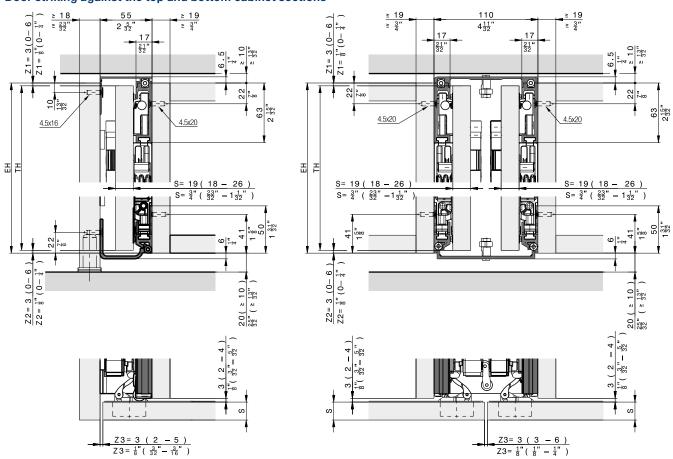

Components required for one cabinet





Hawa Concepta III 35 Push, left

	No.
Hawa Concepta III 35, basic set left, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	30996
Hawa Concepta III 25/35, Push slide-in set, left	30998
Upright profile L= 2474 mm (8' 1 13/32''), for door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, anodized	30771

Hawa Concepta III 35 Push, right

	No.
Hawa Concepta III 35, basic set right, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	30997
Hawa Concepta III 25/35, Push slide-in set, right	30999
Upright profile L= 2474 mm (8' 1 13/32''), for door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, anodized	30771

-

Weight and door size ratio calculations

The maximum weight must be adapted depending on the door size ratio.

DE Türbreite / FR Largeur de porte / EN Door width / IT Larghezza anta / ES Ancho de puerta

		440	500	550	600	650	700	750]
	2700	35	35	35	35	35	35	35	
	2650	35	35	35	35	35	35	35	En la
	2600	35	35	35	35	35	35	35	Maximum kg
	2550	35	35	35	35	35	35	35	
Door hight /	2500	35	35	35	35	35	35	35	g/E mos
	2450	35	35	35	35	35	35	34	Poids maximale en kg / EN kg / ES Pesos máximos en
	2400	35	35	35	35	35	35	33	male
	2350	35	35	35	35	35	34	32	
N N	2300	35	35	35	35	35	34	31	oids j/⊟
Hauteur de porte / EN S Altura de puerta	2250	35	35	35	35	35	33	31	Maximale Gewichte in kg / FR Poids m jhts in kg / IT Pesi massimo in kg / ES
de po de po	2200	35	35	35	35	34	32	30	
teur (Itura	2150	35	35	35	35	33	31	29	e in k mas
Hau	2100	35	35	35	35	32	30	28	vicht
Türhöhe / FR Ha Altezza anta / ES	2050	35	35	35	34	31	29	27	ΰ.
	2000	35	35	35	33	30	28	26	hale by r
Türh	1950	35	35	35	32	29	27	26	DE Maximale G weights in kg / ∏
. Ч	1900	35	35	34	31	29	27	25	DE

DE Türgewicht in kg / FR Poids de porte en kg / EN Door weight in kg / IT Peso anta in kg / ES Peso de puerta en kg

	1'5 <u>5</u> "	1'7 <u>11</u> "	1'9 <u>21</u> "	1'11 ⁵ /8"	2'1 1 19 32"	2'3 <u>9</u> "	2'5 17 32"	
8' 10 <u>5</u> "	77	77	77	77	77	77	77	_
8' 8 11 32"	77	77	77	77	77	77	77	Maximum Ibs.
8'6 <u>3</u> "	77	77	77	77	77	77	77	bs.
8' 4 13/32"	77	77	77	77	77	77	77	ximale en Ibs. / EN Ma Pesos máximos en Ibs
8' 2 7/16"	77	77	77	77	77	77	77	lbs.
8'0 15''	77	77	77	77	77	77	75	e en s mé
7' 10 <u>1</u> "	77	77	77	77	77	77	73	vimal Peso
7' 8 17''	77	77	77	77	77	75	71	
7'6 <u>9</u> "	77	77	77	77	77	75	68	Poids maximale en lbs. / EN lbs. / ES Pesos máximos er
7'4 19"	77	77	77	77	77	73	68	
7'2 <u>5</u> "	77	77	77	77	75	71	66	Gewichte in Ibs. / FR Poids me
7'0 <u>21</u> "	77	77	77	77	73	68	64	i n B
6' 10 11/16"	77	77	77	77	71	66	62	Vichte Pes
6' 8 23 "	77	77	77	75	68	64	60	
6'6 <u>3</u> "	77	77	77	73	66	62	57	Maximale thts in Ibs.
6' 4 ²⁵ / ₃₂ "	77	77	77	71	64	60	57	Maxii hts ir
6' 2 13/16"	77	77	75	68	64	60	55	DE Maximale weights in Ibs.
	DE Tim		he / EE	Doido	lo norto i	n lha /		

DE Türgewicht in Ibs. / FR Poids de porte en Ibs. / EN Door weight in Ibs. / IT Peso anta in Ibs. / ES Peso de puerta en Ibs.

Hawa Configurator

List of individual parts, which are included in the sets:

Set for 1 pivot /slide-in door up to 35 kg (77 lbs.)

Suitable slide-in set

				No.
Hawa Concepta 1900–2700 mm	30996			
	III 35, basic set right, door (6' 2 13/16'' to 8' 10 5/16'')	heig	ght	30997
Set consisting	of:	30996	30997	No.
	Slot nuts for hinge attachment, plastic, black	4	4	30686
	Mounting plate for hinge with height adjustment, steel, nickel-plated	1	1	30738
	Concealed hinge, with soft closing mechanism and closing spring, steel, nickel plated	4	4	31070
8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8	Set for concealed hinges, 8 screws 4x16 mm (5/32"x5/8"), 3 door stop buffers	1	1	30811
0	Profile for magnetic guide, with double-sided adhesive tape, steel, black, L=730 mm (2' 4 3/4")	2	2	30983
	Euro screw, 6x13 mm (1/4"x1/2"), steel, black, set of 6 pieces	1	1	30986
e e e e e e e e e e e e e e e e e e e	Bottom guide track left, aluminum, anodized, L= 838 mm (2' 9")	1		30805
	Top running track left, aluminum, anodized, L= 838 mm (2' 9")	1		31059
999999999 99999999999	Countersunk head screw, 4.5x20 mm (5/32"x25/32"), steel, zinc-plated , set of 16 pieces	1	1	30810
	Set of adjusting tools	1	1	31047
0	Bottom guide track right, aluminum, anodized, L= 838 mm (2' 9")		1	30806
	Top running track right, aluminum, anodized, L= 838 mm (2' 9")		1	31060

				No.
Hawa Concepta	30998			
Hawa Concepta	III 25/35, Push slide-in set,	, rigł	nt	30999
Set consisting	of:	30998	30999	No.
	Hawa Concepta III 25/35 Push slide-in unit, left	1		31038
0000	End stop bracket for push ejector, steel, zinc-plated	1	1	31043
	Push ejector, plastic, black	1	1	31010
	Push-to-open with adapter plate, plastic, black	1	1	30838
550	Hawa Concepta III Push set of cover caps, for left-hand stop, plastic, black	1		30818
	Hawa Concepta III 25/35 Push slide-in unit, right		1	31039
	Hawa Concepta III Push set of cover caps, for right-hand stop, plastic, black		1	30827

Cabinet connecting parts

		mm (inch)	No.
	Connector set 55 mm (2 5/32''), for exterior connection to cabinet	560 (1' 10 1/16'')	31005
100 1444	Connector top 55 mm (2 5/32"), for exterior connection to cabinet	560 (1' 10 1/16'')	31430
	Connector top 110 mm (4 11/32"), for two pivot/slide-in doors	500 (1' 7 11/16'')	31006
Real Provide American Americ	Connector bottom 110 mm (4 11/32"), for two pivot/slide-in doors	500 (1' 7 11/16'')	31246
RRRRRRRRRRRRR	Connector bottom 110 mm (4 11/32"), for two pivot/slide-in doors (for installation in front of fixed plinth)	26 (1 1/32'')	31007

Guides

	No.
Guide for two inset pivot sliding doors, aluminum	25680

Accessories



No. Support for Halemeier automatic shut-off device Matching push button item 36 979 01 for Halemeier automatic shut-off device (Safety Box)

31020

Straightening fitting

ightarrow Details under accessories frome page 265 Aluminum rew

	Nr.
Straightening fitting for doors 2040–2600 mm (6' 8 5/16'' to 8' 6 3/8''), aluminum	056.3192.072
Straightening fitting for doors 1715–2275 mm (3' 11 27/32'' to 5' 9 7/8''), aluminum	056.3192.079


Aluminum anodized


	No.
Straightening fitting for doors 2240–2850 mm (7' 4 3/16'' to 9' 4 7/32''), aluminum, anodized	056.3192.071
Straightening fitting for doors 2040–2600 mm (6' 8 5/16'' to 8' 6 3/8 ''), aluminum, anodized	056.3192.082
Straightening fitting for doors 1715–2275 mm (5' 7 17/32'' to 7' 5 9/16''), aluminum, anodized, can be shortened for doors 1215–1715 mm (3'11 27/32''to 5' 7 17/32'')	056.3192.080

Aluminum black anodized

		No.
	Straightening fitting for doors 2240–2850 mm (7' 4 3/16'' to 9' 4 7/32''), aluminum, black anodized	056.3192.074
	Straightening fitting for doors 2040–2600 mm (6' 8 5/16'' to 8' 6 3/8''), aluminum, black anodized	056.3192.075
	Straightening fitting for doors 1715–2275 mm (5' 7 15/32'' to 7' 5 9/16''), aluminum, black anodized	056.3192.081


Straightening fitting

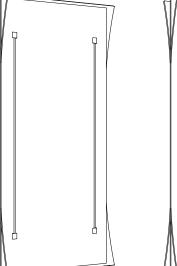


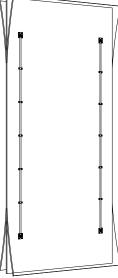





Further installation examples Composed cabinet

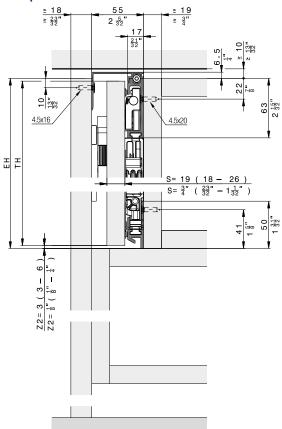







Cabinet without base panel

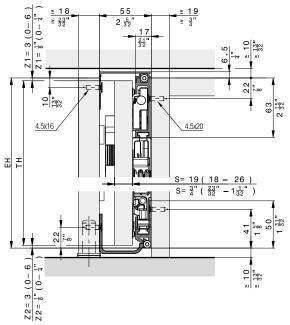


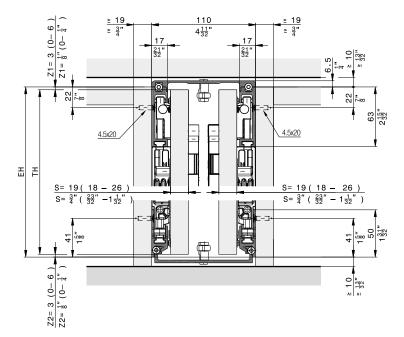

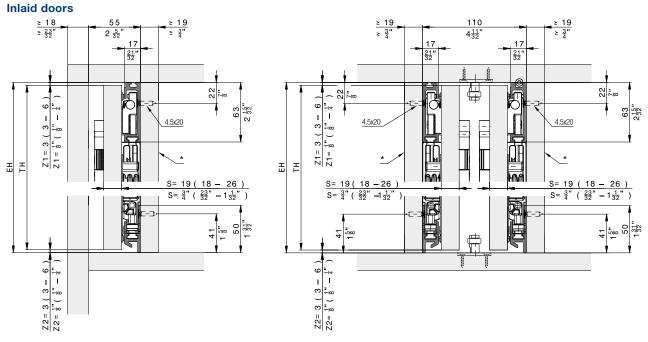


* removable

Floor-to-ceiling doors

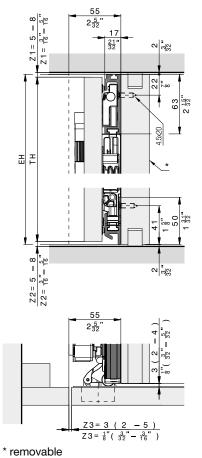




Hardware depth calculation




	mm	Inch
T1	TB + 92 + Z3 - M	TB + 3 ⁵ / ₈ " + Z3 - M
E1	ТВ - М	ТВ - М
м	≥S+3 ≤TB-320	≥S + ⁵ / ₈ " ≤TB - 1 ^{<u>19</u>}

Door flush with outer face

Protruding door





Videos

Accessories

- Straightening fitting from page 265

Planning/execution Configure with just a few clicks at www.hawa.com/configurator

Further information about the product can be found on www.hawa.com.