


**Hardware for pivoting and lateral sliding in of wooden doors up to 35 kg (77 lbs.). Uniform, flush front design with even gap pattern. Pull version with handle and integrated soft closing mechanism.**

### Product highlights

- Productivity** Easy installation thanks to high degree of pre-assembly with intuitive adjustment
- Comfort** Ergonomic movement support for even, smooth movement
- Aesthetics** Allows constructions with and without handle – the technology remains invisible


### Technical specifications

- 10–35 kg (22 to 77 lbs.)
- 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")
- 440–750 mm (1' 5 5/16" to 2' 5 17/32")
- 18–26 mm (23/32" to 1 1/32")


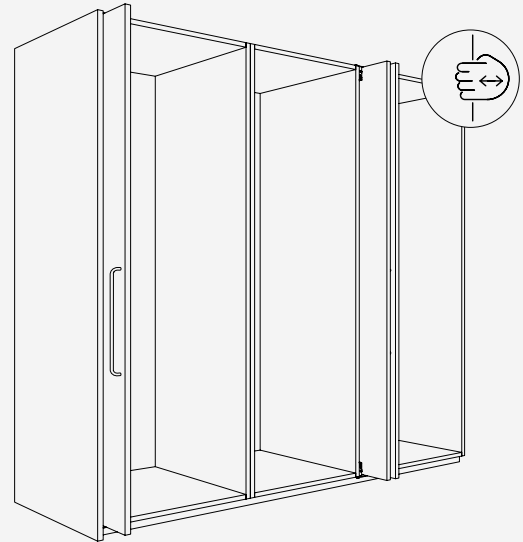


### Installation examples

#### Door striking against the top and bottom cabinet sections

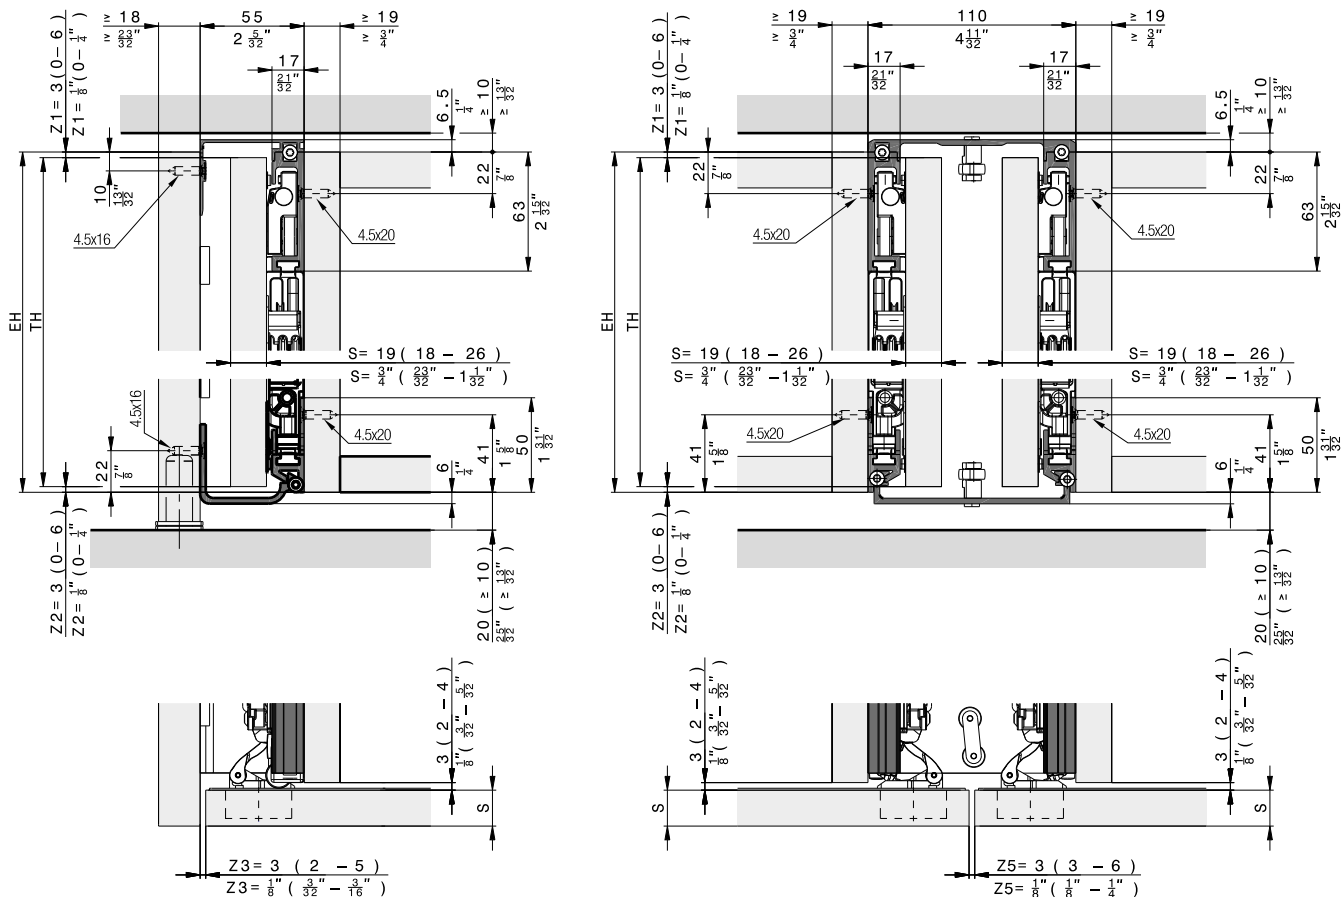

### Components required for one cabinet



#### Hawa Concepta III 35 Pull, left

No.	
30996	Hawa Concepta III 35, basic set left, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")
31000	Hawa Concepta III 25/35, Pull slide-in set, left
30771	Upright profile L= 2474 mm (8' 1 13/32"), for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized

#### Hawa Concepta III 35 Pull, right

No.	
30997	Hawa Concepta III 35, basic set right, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")
31001	Hawa Concepta III 25/35, Pull slide-in set, right
30771	Upright profile L= 2474 mm (8' 1 13/32"), for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized

### Weight and door size ratio calculations

The maximum weight must be adapted depending on the door size ratio.

DE Türbreite / FR Largeur de porte / EN Door width / IT Larghezza anta / ES Ancho de puerta

	440	500	550	600	650	700	750	
2700	35	35	35	35	35	35	35	DE Maximale Gewichte in kg / FR Poids maximale en kg / EN Maximum weights in kg / IT Pesì massimo in kg / ES Pesos máximos en kg
2650	35	35	35	35	35	35	35	
2600	35	35	35	35	35	35	35	
2550	35	35	35	35	35	35	35	
2500	35	35	35	35	35	35	35	
2450	35	35	35	35	35	35	34	
2400	35	35	35	35	35	35	33	
2350	35	35	35	35	35	34	32	
2300	35	35	35	35	35	34	31	
2250	35	35	35	35	35	33	31	
2200	35	35	35	35	34	32	30	
2150	35	35	35	35	33	31	29	
2100	35	35	35	35	32	30	28	
2050	35	35	35	34	31	29	27	
2000	35	35	35	33	30	28	26	
1950	35	35	35	32	29	27	26	
1900	35	35	34	31	29	27	25	

DE Türgewicht in kg / FR Poids de porte en kg / EN Door weight in kg / IT Peso anta in kg / ES Peso de puerta en kg

	1' 5 5/16"	1' 7 11/16"	1' 9 21/32"	1' 11 5/8"	2' 1 19/32"	2' 3 9/16"	2' 5 17/32"	
8' 10 5/16"	77	77	77	77	77	77	77	DE Maximale Gewichte in lbs. / FR Poids maximale en lbs. / EN Maximum weights in lbs. / IT Pesì massimo in lbs. / ES Pesos máximos en lbs.
8' 8 11/32"	77	77	77	77	77	77	77	
8' 6 9/16"	77	77	77	77	77	77	77	
8' 4 13/32"	77	77	77	77	77	77	77	
8' 2 7/16"	77	77	77	77	77	77	77	
8' 0 15/32"	77	77	77	77	77	77	75	
7' 10 1/2"	77	77	77	77	77	77	73	
7' 8 17/32"	77	77	77	77	77	75	71	
7' 6 9/16"	77	77	77	77	77	75	68	
7' 4 19/32"	77	77	77	77	77	73	68	
7' 2 5/8"	77	77	77	77	75	71	66	
7' 0 21/32"	77	77	77	77	73	68	64	
6' 10 11/16"	77	77	77	77	71	66	62	
6' 8 23/32"	77	77	77	75	68	64	60	
6' 6 3/4"	77	77	77	73	66	62	57	
6' 4 25/32"	77	77	77	71	64	60	57	
6' 2 13/16"	77	77	75	68	64	60	55	













DE Türgewicht in lbs. / FR Poids de porte en lbs. / EN Door weight in lbs. / IT Peso anta in lbs. / ES Peso de puerta en lbs.

### Hawa Configurator

## List of individual parts, which are included in the sets:







### Set for 1 pivot /slide-in door up to 35 kg (77 lbs.)

	No.
Hawa Concepta III 35, basic set left, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30996
Hawa Concepta III 35, basic set right, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30997






	30996	30997	No.
<b>Set consisting of:</b>			
	4	4	30686
	1	1	30738
	4	4	31070
	1	1	30811
	2	2	30983
	1	1	30986
	1		30805
	1		31059
	1	1	30810
	1	1	31047
		1	30806
		1	31060

### Suitable slide-in set


	No.
Hawa Concepta III 25/35, Pull slide-in set, left	31000
Hawa Concepta III 25/35, Pull slide-in set, right	31001

	31000	31001	No.
<b>Set consisting of:</b>			
	1		31040
	1	1	31414
	1	1	31221
	1		30964
		1	31041
		1	30965


**Cabinet connecting parts**

		mm (inch)	No.
	Connector set 55 mm (2 5/32''), for exterior connection to cabinet	560 (1' 10 1/16'')	31005
	Connector top 55 mm (2 5/32''), for exterior connection to cabinet	560 (1' 10 1/16'')	31430
	Connector top 110 mm (4 11/32''), for two pivot/slide-in doors	500 (1' 7 11/16'')	31006
	Connector bottom 110 mm (4 11/32''), for two pivot/slide-in doors	500 (1' 7 11/16'')	31246
	Connector bottom 110 mm (4 11/32''), for two pivot/slide-in doors (for installation in front of fixed plinth)	26 (1 1/32'')	31007

**Guides**

	No.
	25680



**Accessories**

	No.
	31020




**Straightening fitting**

→ Details under accessories from page 265




**Aluminum rew**


	Nr.
	056.3192.072
	056.3192.079

**Aluminum anodized**




	No.
	056.3192.071
	056.3192.082
	056.3192.080

**Aluminum black anodized**



	No.
	056.3192.074
	056.3192.075
	056.3192.081

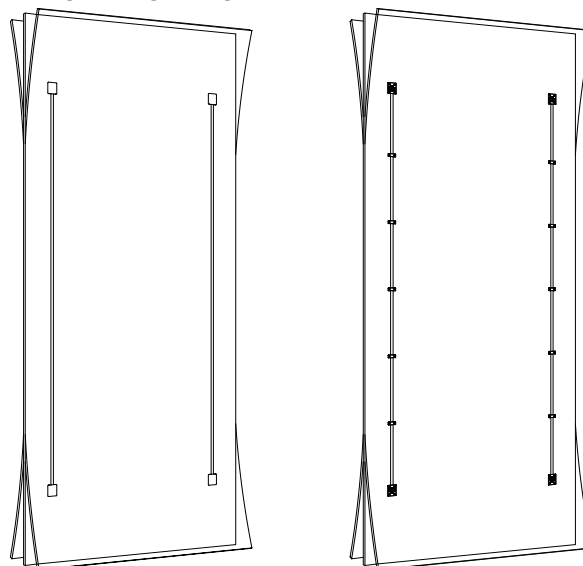**Straightening fitting**


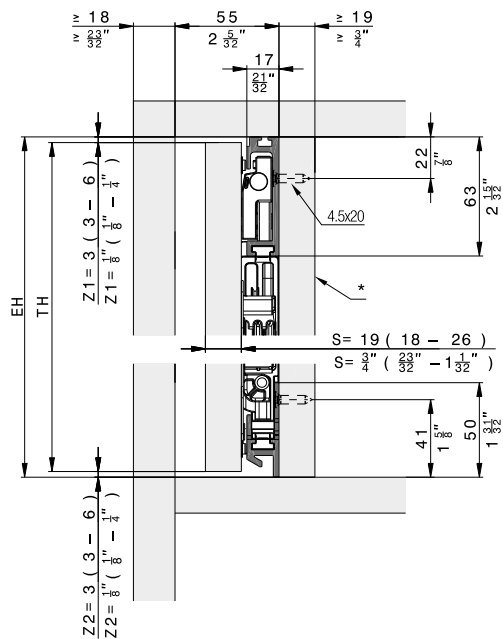
### Composed cabinet

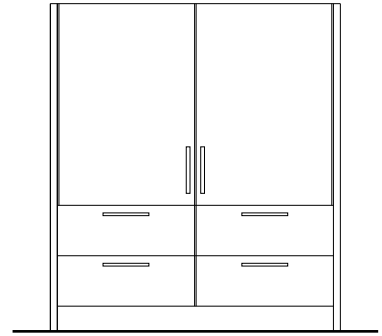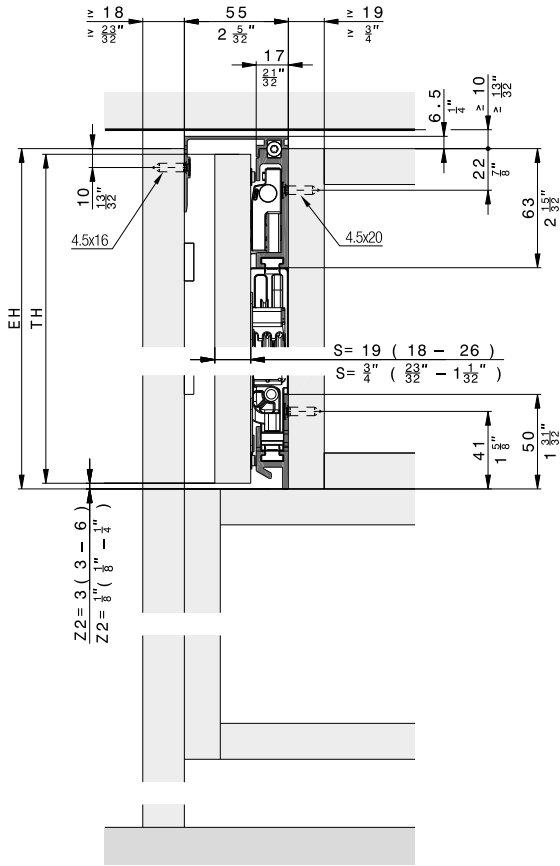


### Cabinet without base panel

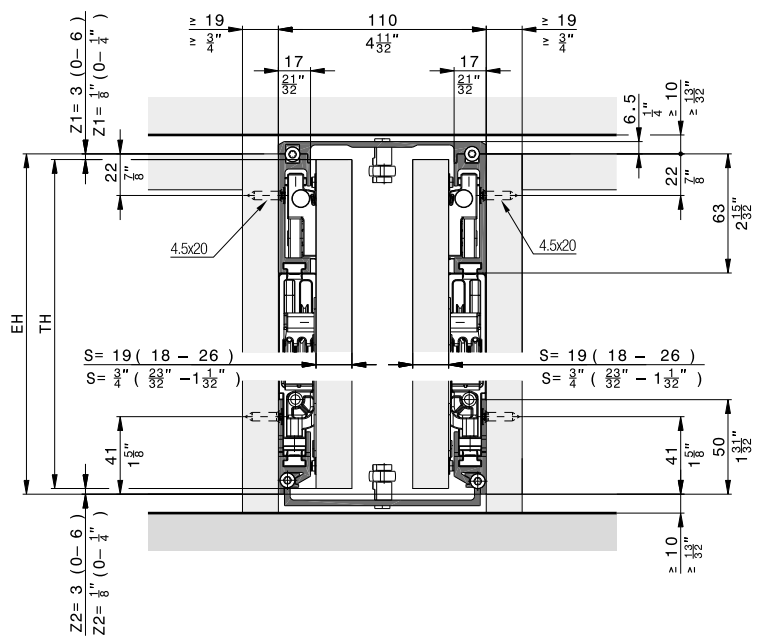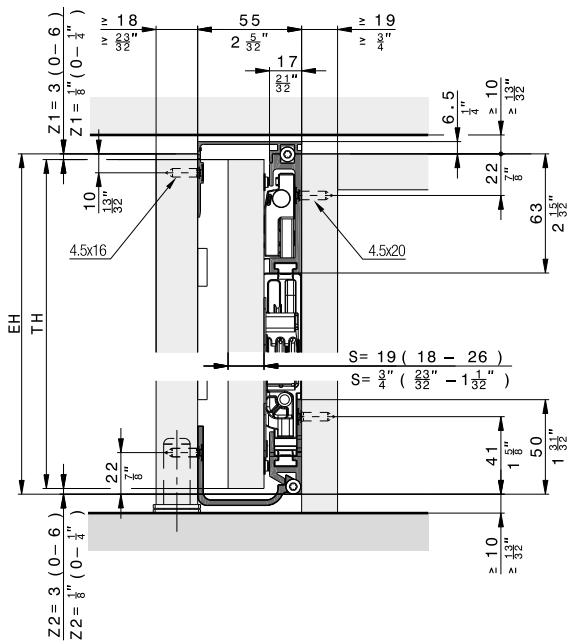


## Inlaid doors



\* removable

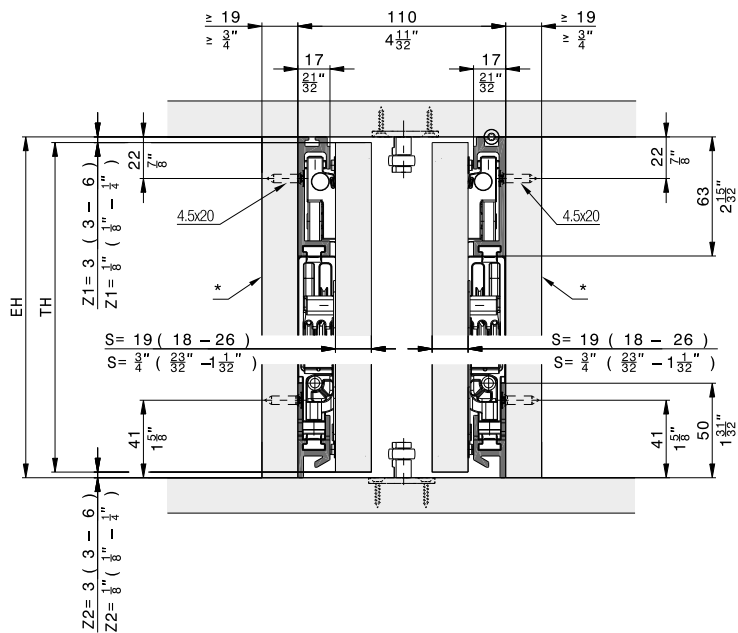


## Floor-to-ceiling doors

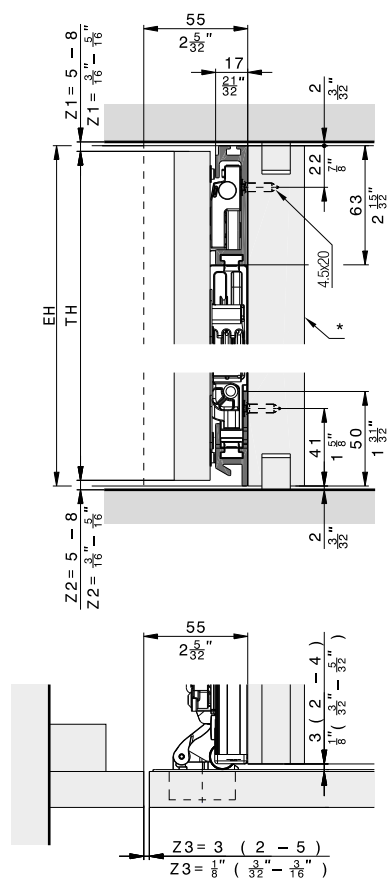

\* removable


Hardware depth calculation

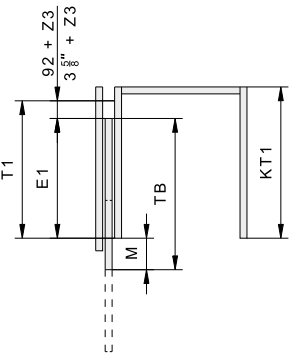


	mm	Inch
T1	≥ 414	≥ 1' 4 <sup>5</sup> / <sub>16</sub> "

	mm	Inch
T1	TB + 92 + Z3 - M	TB + 3 <sup>5</sup> / <sub>8</sub> " + Z3 - M
E1	TB - M	TB - M
M	≥S+3 ≤TB-320	≥S + <sup>5</sup> / <sub>8</sub> " ≤TB - 1 <sup>19</sup> / <sub>32</sub> "

Door flush with outer face



Protruding door

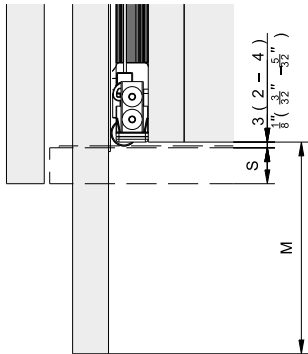

Instructions

Videos

Accessories

- Straightening fitting from page 265

Planning/execution

Configure with just a few clicks at [www.hawa.com/configurator](http://www.hawa.com/configurator)

Further information about the product can be found on [www.hawa.com](http://www.hawa.com).